



Connector Location A

Connector Location B

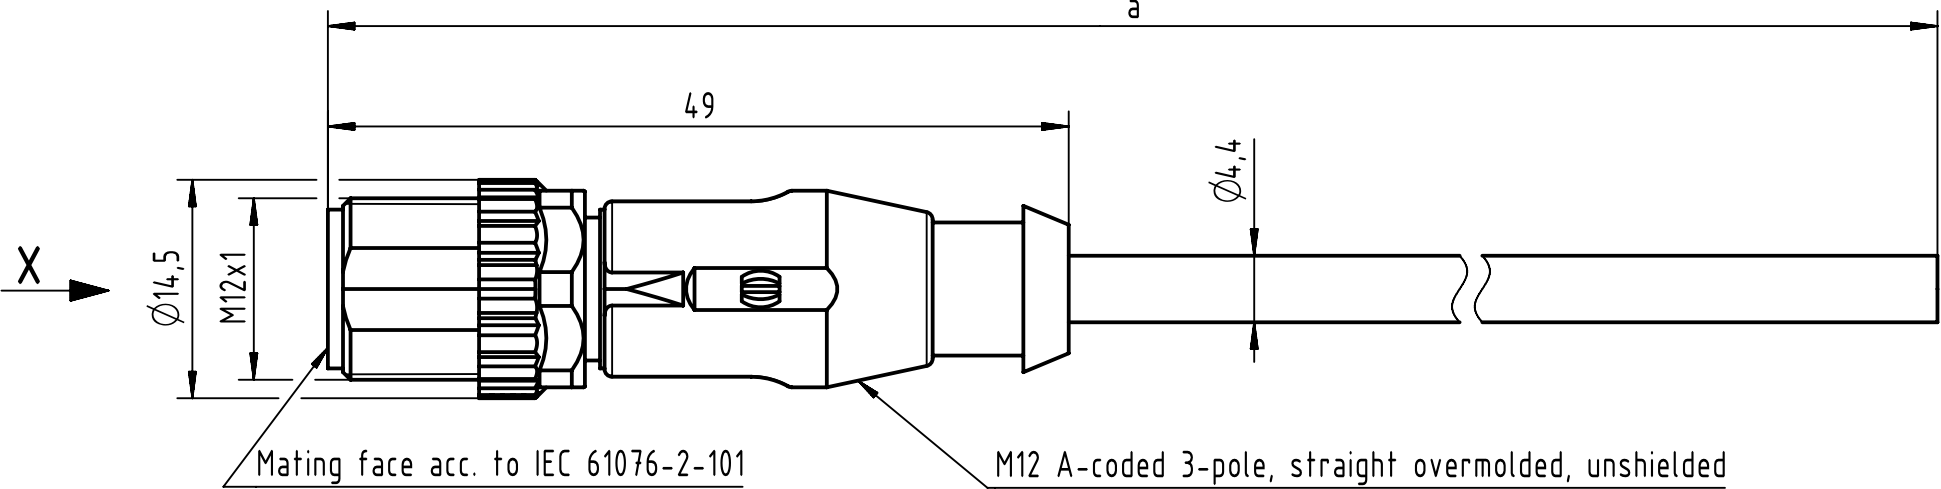


X
male



Loading Plan

- 1 brown
- 3 blue
- 4 black

- Protection level: IP67
- Temperature range: -25°C ... +80°C

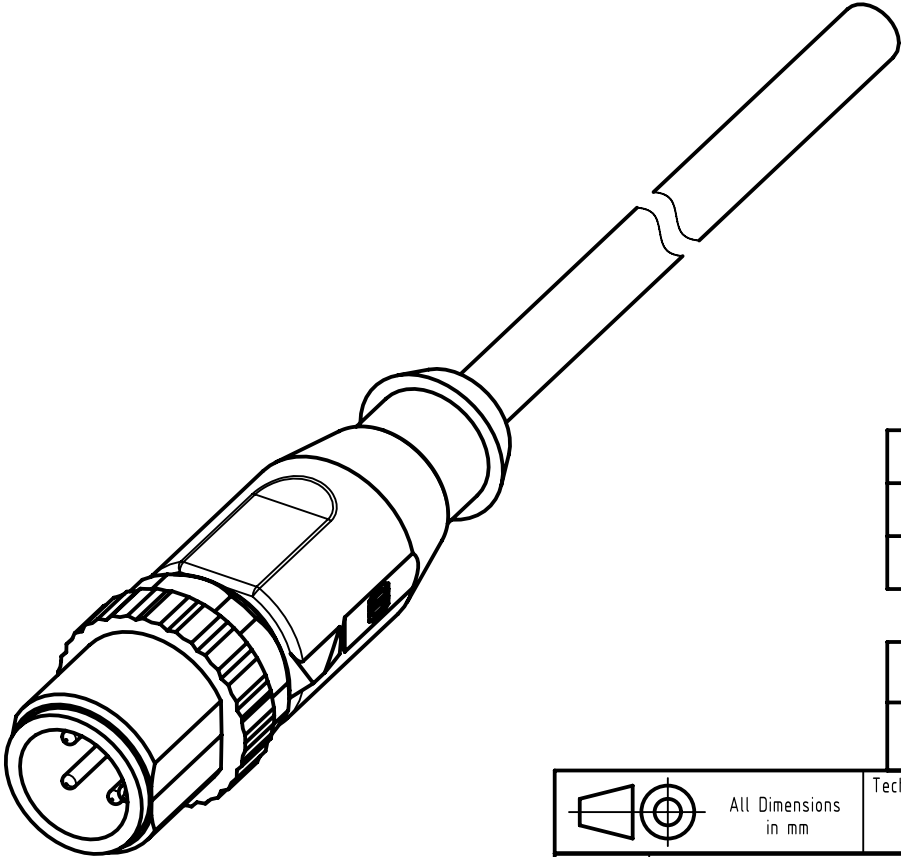

4.0 to 100	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

PVC grey, 3x0.34mm ²	21348400383XXX
Type of cable	Part no.

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by STOCHECIC Stoccheci		Inspected by COSTEA Costea		Standardisation MUNTEANV Muntean	
Department HCS - RO		Date 2023-04-20		State Final Release		Doc-Key / ECM-Nr. 100578777/UGD/009/D 500000239724	
HARTING Customised Solutions		Title M12 Cable Assembly A-cod st/- m/-		Rev. D		Page 1/1	
D-32339 Espelkamp		Type TB		Number 21348400383XXX			