


LUNS 302.830.1/DALI


Lunata Small (1xLED 21W 830/3000K 2290lm)

— C0/C180 cd / 1000 lm - - - C90/C270

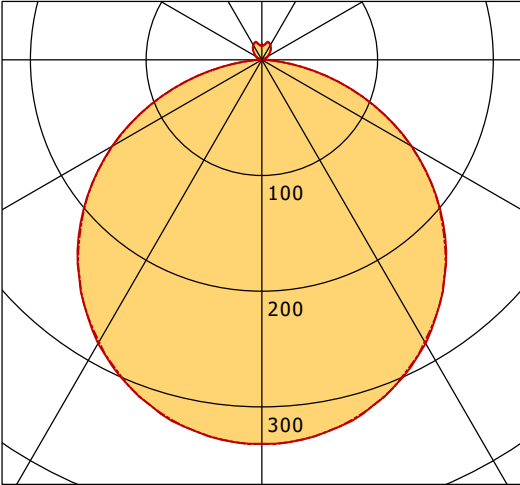

	C0	C90	C180	C270
0°	332	332	332	332
15°	320	319	320	319
30°	283	281	283	281
45°	225	224	225	224
60°	149	149	149	149
75°	63	63	63	63
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

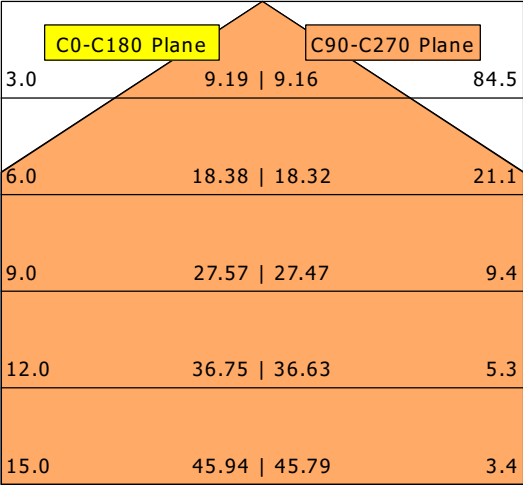

η	LED
Efficiency	109 lm/W
Direct/Indirect	↓ 96% / ↑ 4%
System Power	21 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	19.9
UGR C90/C270	19.9
CIE Flux Codes	47 79 96 96 100
Ra/CRI	> 80