



Connector Location A

Connector Location B

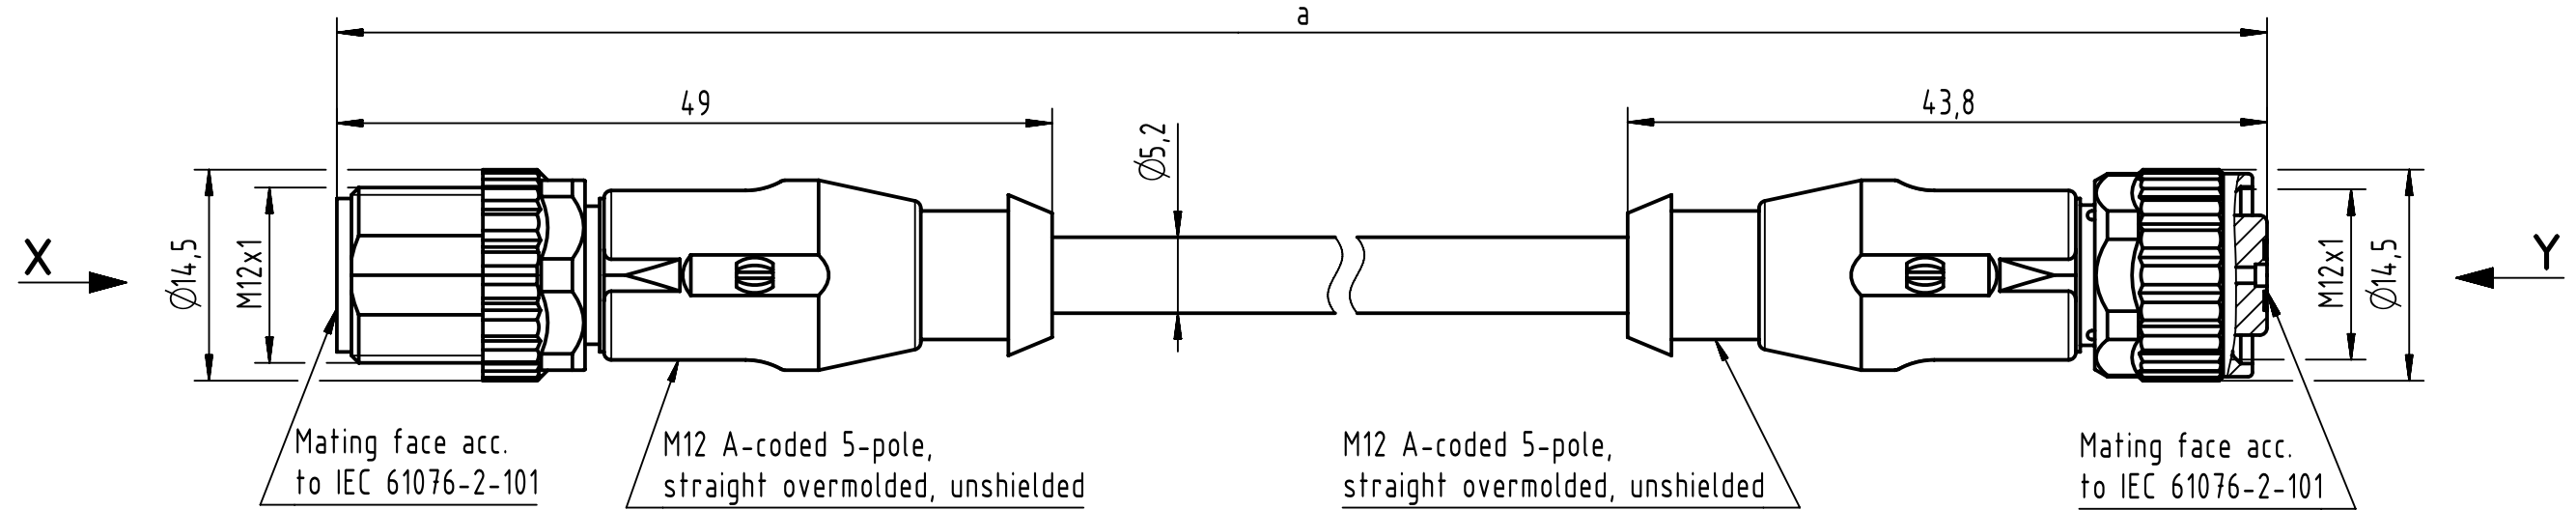



X
male

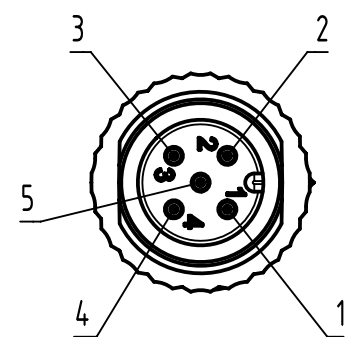

Loading Plan

- 1 brown
- 2 white
- 3 blue
- 4 black
- 5 green/yellow

Y
female

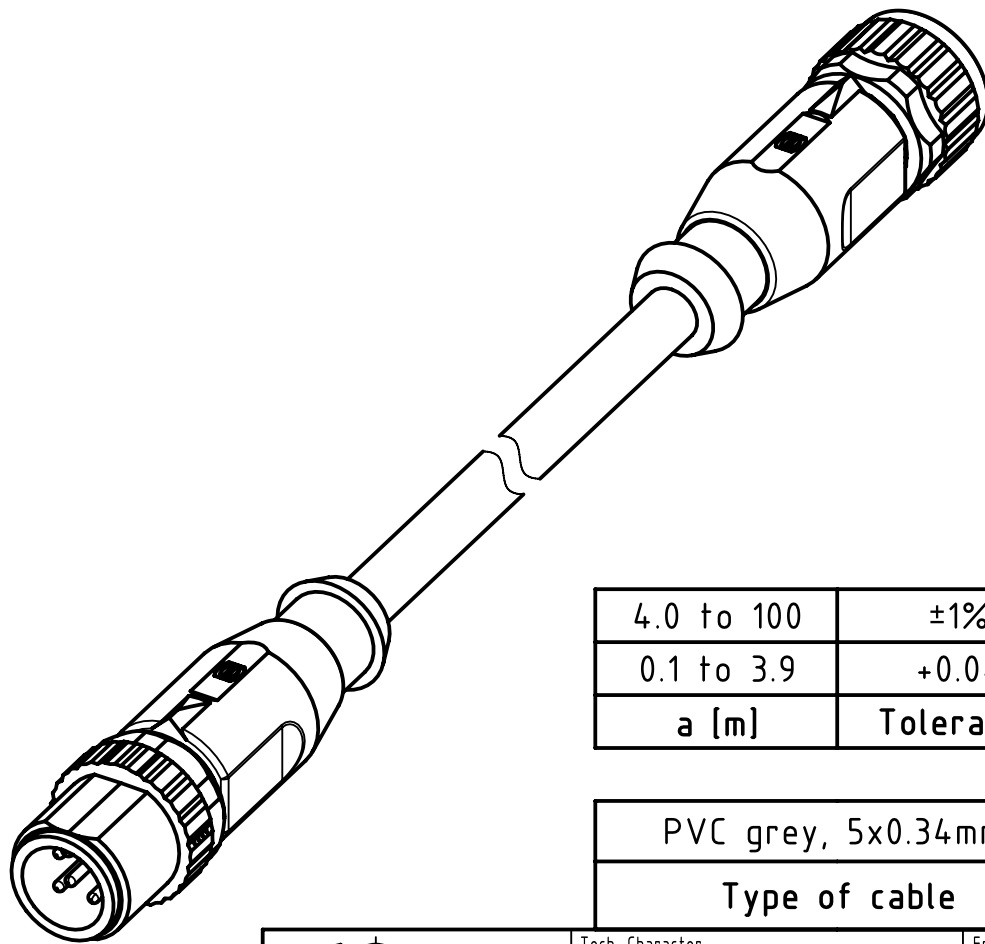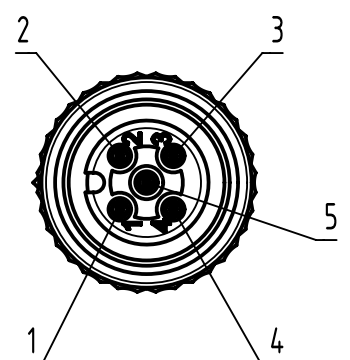

4.0 to 100	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

PVC grey, 5x0.34mm ²	21348485585XXX
Type of cable	Part no.

- Protection level: IP67
- Temperature range: -25°C ... +80°C

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
	All rights reserved	Created by COSTEA Costea	Inspected by 402676 Gross	Standardisation MUNTEANV Muntean	Date 2023-05-29	State Final Release	
	Department HCS - RO	Title M12 Cable Assembly A-cod st/st m/f				Doc-Key / ECM-Nr. 100578788/UGD/009/E 500000238681	
HARTING Customised Solutions D-32339 Espelkamp		Type TB	Number 21348485585XXX			Rev. E	Page 1/1