


PLL 57.1225.30.2/DALI


PL 57 (1xLED 197W 830/3000K 15030lm)

— C0/C180 cd / 1000 lm - - - C90/C270

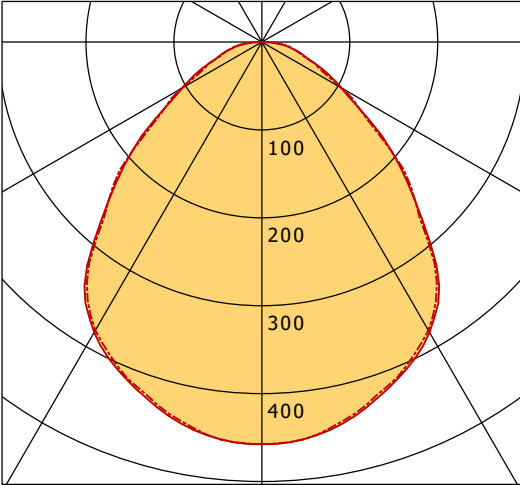

	C0	C90	C180	C270
0°	457	457	457	457
15°	435	433	435	433
30°	381	379	381	379
45°	240	243	240	243
60°	104	107	104	107
75°	44	42	44	42
90°	5	3	5	3
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

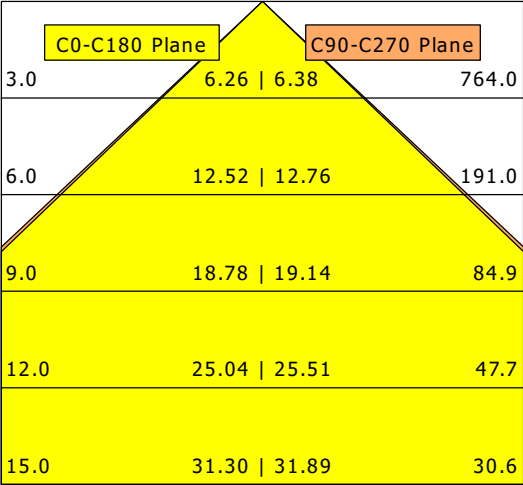

η		LED
Efficiency		76 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		197 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		18.4
UGR C90/C270		18.4
CIE Flux Codes		60 87 97 100 100
Ra/CRI		> 80