



CSARL 71.4040.25/DALI

CSA 71 Round (1xLED 40W 840/4000K 4460lm 25 °)

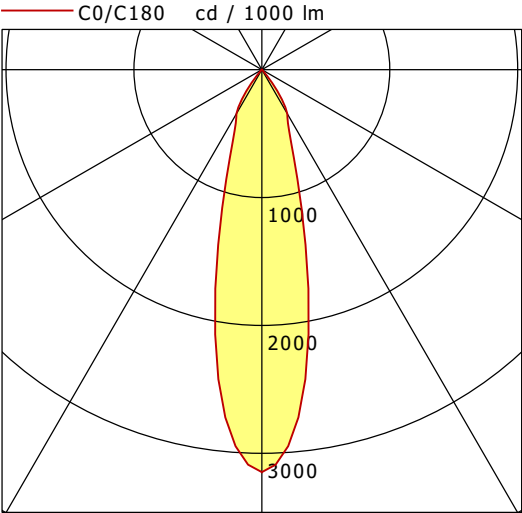

	C0	C90	C180	C270
0°	3147	3147	3147	3147
15°	1261	1261	1261	1261
30°	397	397	397	397
45°	5	5	5	5
60°	4	4	4	4
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

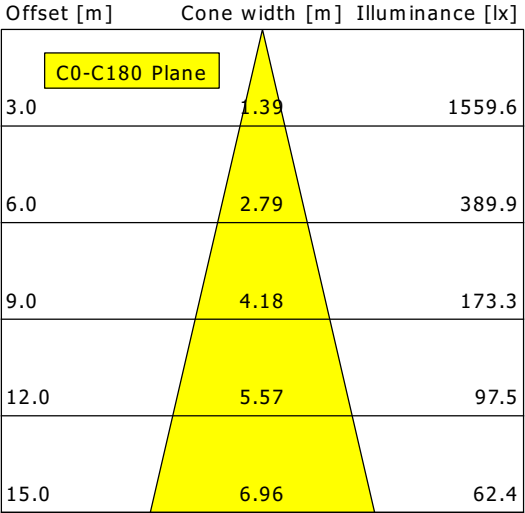

η		LED
Efficiency		112 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		40 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		20.2
UGR C90/C270		20.2
CIE Flux Codes	98 99 100 100 100	
Ra/CRI		> 80