

Panel mounting socket outlet, straight - flange 60x60, fixing centers 50-52x50-52

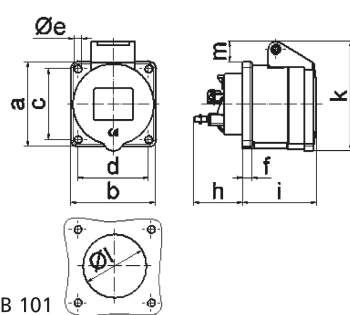


Product description	
BALS-Prd.-Nr	13661
EAN	4024941136617
Product category	Panel mounting socket outlet Quick-Connect, straight
Current	16A
Number of poles	4p
Poles	3P+PE
Position of earth contact	4 h
Voltage	100 up to 130V

Product description	
Frequency	50 and 60Hz
Protection degree	IP44
Colour code	yellow RAL 1012
Colour of appliance	Hinged lid yellow RAL 1012, Enclosure grey RAL 7035
Connection design	screwless spring terminals as cage clamp with Kontex-contact
Maximum conductor size	4,0 qmm
Cable entry	other
Height	78mm
Width	60mm
Depth	88mm
Flange size vertical	60mm
Flange size horizontal	60mm
Drill hole distance vertical	51mm
Drill hole distance horizontal	51mm
Material of enclosure	Polyamide
Contact	The contact carrier is made of polyamide, The contacts are brass

Logistics data	
Weight/pcs	0.12 kg / Piece
Packaging	Bag

Logistics data	
Content amount	1 ST
EAN	4024941136617
Length	88 mm
Width	60 mm
Height	78 mm
Weight	0.121 kg
Volume	411.84 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941828895
Length	275 mm
Width	175 mm
Height	137 mm
Weight	1.325 kg
Volume	5,737.5 ccm

 <p>4 MB 101</p>	Ampere	16	16				
	Polzahl	3	4				
	a	56,0	60,0				
	b	56,0	60,0				
	c	44,0	50 - 52				
	d	44,0	50 - 52				
	e Ø	4,4	5,5				
	f	7,0	7,0				
	h	35,5	35,5				
	i	51,0	53,0				
	k	70,0	80,0				
	l Ø	45,0	45,0				
	m	13,0	9,0				
	Leiter mm ² min	1,5	1,5				
Leiter mm ² max	4	4					