


PLL 28.385.40.1/DALI

PL 28 (1xLED 36W 840/4000K 3850lm)

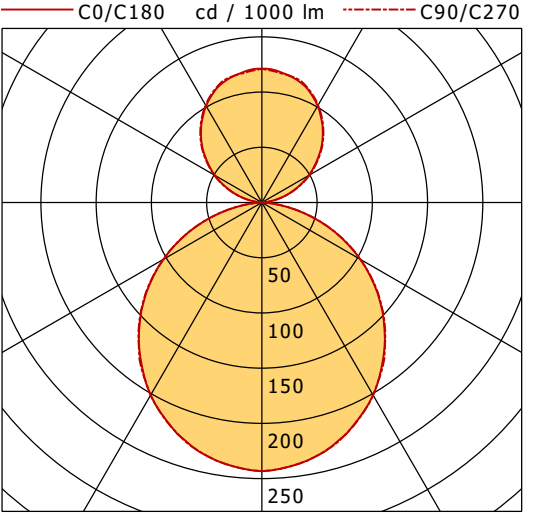

	C0	C90	C180	C270
0°	243	243	243	243
30°	201	202	201	202
60°	103	103	103	103
90°	0	0	0	0
120°	49	50	49	50
150°	101	102	101	102
180°	121	121	121	121
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	107 lm/W
Direct/Indirect	↓ 67% / ↑ 33%
System Power	36 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.8
UGR C90/C270	20.8
CIE Flux Codes	48 79 96 67 100
Ra/CRI	> 80