


# ML-E 060.11840.3 AOV/DALI


Monoline 060 | Recessed (1xLED 32W 840/4000K 5010lm)

— C0/C180    cd / 1000 lm    - - - C90/C270

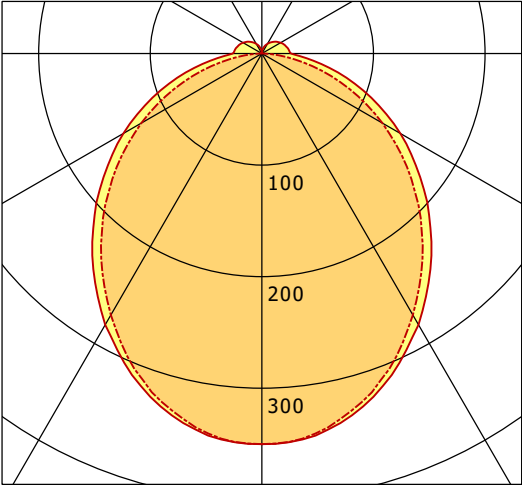

|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 350 | 350 | 350  | 350  |
| 15°          | 332 | 328 | 332  | 328  |
| 30°          | 281 | 271 | 281  | 271  |
| 45°          | 213 | 200 | 213  | 200  |
| 60°          | 143 | 125 | 143  | 125  |
| 75°          | 75  | 51  | 75   | 51   |
| 90°          | 26  | 1   | 26   | 1    |
| cd / 1000 lm |     |     |      |      |

Offset [m]    Cone width [m]    Illuminance [lx]

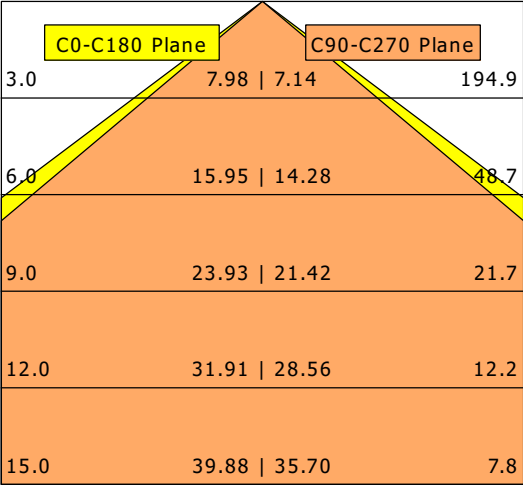

|                    |                 |
|--------------------|-----------------|
| <b>η</b>           | LED             |
| Efficiency         | 157 lm/W        |
| Direct/Indirect    | ↓ 93% / ↑ 7%    |
| System Power       | 32 W            |
| <b>UGR</b>         | X=4H, Y=8H      |
| Reflection factors | 70/50/20        |
| UGR C0/C180        | 25.0            |
| UGR C90/C270       | 24.1            |
| CIE Flux Codes     | 48 78 94 93 100 |
| Ra/CRI             | > 80            |