

## Ringo Star-P3

Pendant luminaire - Direct/indirect light distribution

Article code: RP3ABE-830M-D1500-K



Illustrations may only be similar and serve as an orientation.





Ringo Star-P3. LED. Pendant luminaire. Luminaire body made of aluminium profile with 60mm track width. Surface finish Jet Black. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Switchable. DxHxW (round). D=1500mm. W=60mm. H=85mm. Cord suspension for parallel installation with power supply cable and ceiling rose (Set). Pendant length max

4000mm. Power supply: transparent. Ceiling rose: Matching luminaire's surface colour. Medium-power current. 17634lm. 175W. 15,9kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

## Ringo Star-P3

Pendant luminaire - Direct/indirect light distribution

Article code: RP3ABE-830M-D1500-K

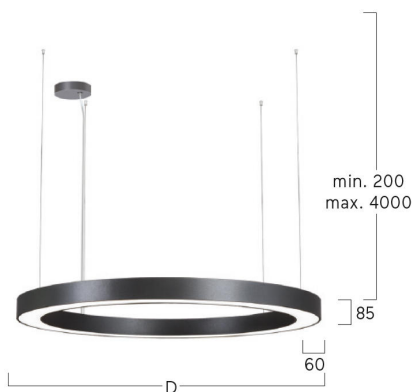

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

|                              |                                                   |
|------------------------------|---------------------------------------------------|
| Productname                  | Ringo Star-P3                                     |
| Lamp                         | LED                                               |
| Installation Type            | Pendant luminaire                                 |
| Surface finish               | Jet Black                                         |
| Light characteristics        | Direct/indirect light distribution                |
| Colour temperature           | 3000K                                             |
| Colour Rendering Index (CRI) | CRI>80                                            |
| Optical system               | Microprismatic screen                             |
| Control                      | Switchable                                        |
| Length L/Diameter D (mm)     | D=1500mm                                          |
| Width W (mm)                 | W=60mm                                            |
| Height H (mm)                | H=85mm                                            |
| Current/Power                | Medium-Power                                      |
| Luminous Flux                | 17634lm                                           |
| Power consumption            | 175W                                              |
| Suspension                   | Parallel susp. (Set)                              |
| Ceiling rose colour          | Ceiling rose: Matching luminaire's surface colour |
| Pendant length (mm)          | Pendant length max 4000mm                         |
| Degree of protection         | IP20                                              |
| Cable Colour                 | Power supply: transparent                         |
| LED lifetime                 | L85B10 (tq 25°C) = 50.000h                        |
| UGR                          | UGR<=19                                           |
| Photometric code             | 8 30 / 3 3 9                                      |
| Photobiological class        | RG0 (EN62471)                                     |
| Indoor/Outdoor               | Indoor: ta [ambient] max. 25°C                    |
| Weight (kg)                  | 15,9kg                                            |

