



# SCEKLP 6.3030.35/DALI

Scene 6 System - Spotlight-Insert (1xLED 36W 830/3000K 3560lm 35 °)

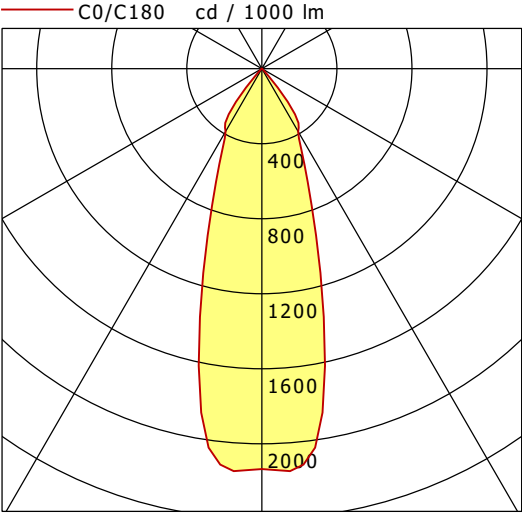

|              | C0   | C90  | C180 | C270 |
|--------------|------|------|------|------|
| 0°           | 2135 | 2135 | 2135 | 2135 |
| 15°          | 1245 | 1245 | 1245 | 1245 |
| 30°          | 387  | 387  | 387  | 387  |
| 45°          | 17   | 17   | 17   | 17   |
| 60°          | 4    | 4    | 4    | 4    |
| 75°          | 0    | 0    | 0    | 0    |
| 90°          | 0    | 0    | 0    | 0    |
| cd / 1000 lm |      |      |      |      |

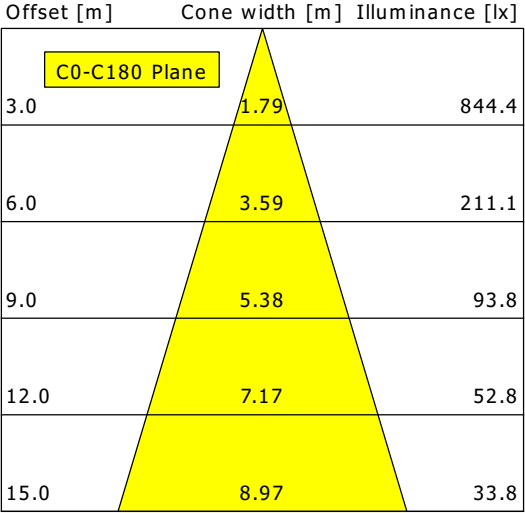

|                    |                    |               |
|--------------------|--------------------|---------------|
| <b>η</b>           |                    | LED           |
| Efficiency         |                    | 99 lm/W       |
| Direct/Indirect    |                    | ↓ 100% / ↑ 0% |
| System Power       |                    | 36 W          |
| <b>UGR</b>         |                    | X=4H, Y=8H    |
| Reflection factors |                    | 70/50/20      |
| UGR C0/C180        |                    | 20.5          |
| UGR C90/C270       |                    | 20.5          |
| CIE Flux Codes     | 98 100 100 100 100 |               |
| Ra/CRI             |                    | > 80          |