


# LUZ-D22 103.840.AS

LUZ | Pendant (1xLED 22W 840/4000K 3380lm)

— C0/C180    cd / 1000 lm    - - - C90/C270

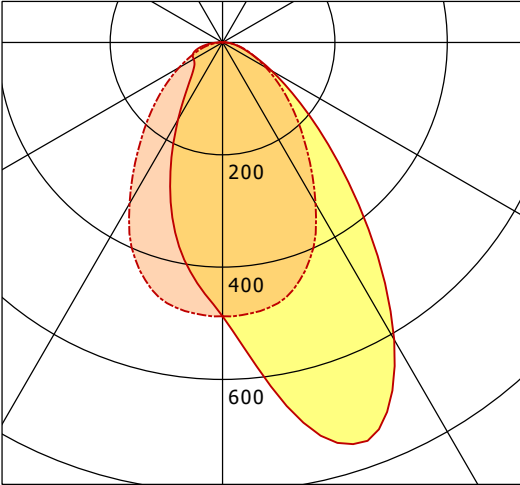

|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 488 | 488 | 488  | 488  |
| 15°          | 733 | 463 | 337  | 463  |
| 30°          | 611 | 331 | 159  | 331  |
| 45°          | 279 | 184 | 75   | 184  |
| 60°          | 101 | 89  | 59   | 89   |
| 75°          | 33  | 36  | 47   | 36   |
| 90°          | 7   | 2   | 8    | 2    |
| cd / 1000 lm |     |     |      |      |

LDC unsuitable for cone representation.  
Asymmetric LDC.

|                        |                 |
|------------------------|-----------------|
| <b>η</b><br>Efficiency | LED<br>154 lm/W |
| Direct/Indirect        | ↓ 99% / ↑ 1%    |
| System Power           | 22 W            |
| <b>UGR</b>             | X=4H, Y=8H      |
| Reflection factors     | 70/50/20        |
| UGR C0/C180            | 23.3            |
| UGR C90/C270           | 22.6            |
| CIE Flux Codes         | 64 88 97 99 100 |
| Ra/CRI                 | > 80            |