


PON-P 104.1678.840/SENSO


Pondero (1xLED 35W 840/4000K 4350lm)

— C0/C180 cd / 1000 lm - - - C90/C270

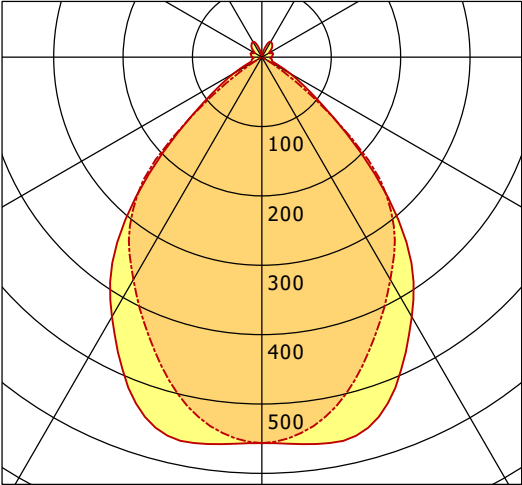

	C0	C90	C180	C270
0°	556	556	556	556
15°	560	493	560	493
30°	432	370	432	370
45°	217	231	217	231
60°	47	9	47	9
75°	15	2	15	2
90°	13	0	13	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

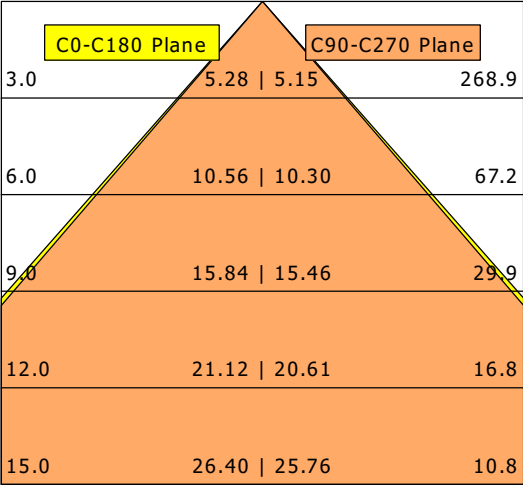

η	LED
Efficiency	124 lm/W
Direct/Indirect	↓ 92% / ↑ 8%
System Power	35 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	14.8
UGR C90/C270	15.3
CIE Flux Codes	72 97 99 92 100
Ra/CRI	> 80