


LUNXS 200.840.1/DALI


Lunata XSmall (1xLED 11W 840/4000K 1130lm)

— C0/C180 cd / 1000 lm - - - C90/C270

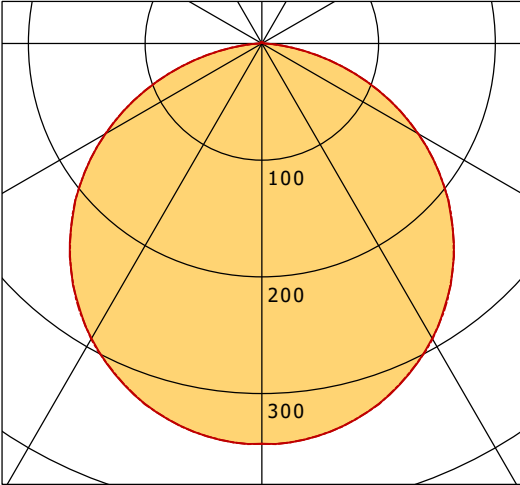

	C0	C90	C180	C270
0°	343	343	343	343
15°	330	330	330	330
30°	292	292	292	292
45°	232	232	232	232
60°	155	155	155	155
75°	66	66	66	66
90°	2	2	2	2
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

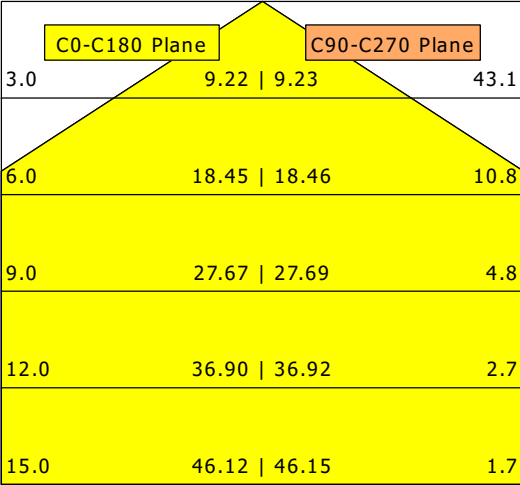

η	LED
Efficiency	103 lm/W
Direct/Indirect	↓ 99% / ↑ 1%
System Power	11 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	20.2
UGR C90/C270	20.3
CIE Flux Codes	47 79 96 99 100
Ra/CRI	> 80