
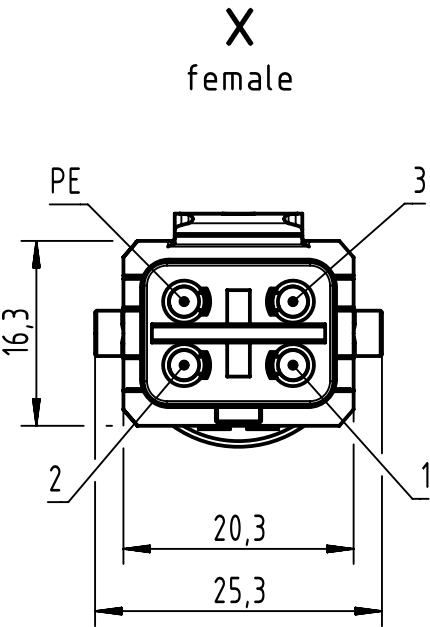


Connector Location A


Connector Location B

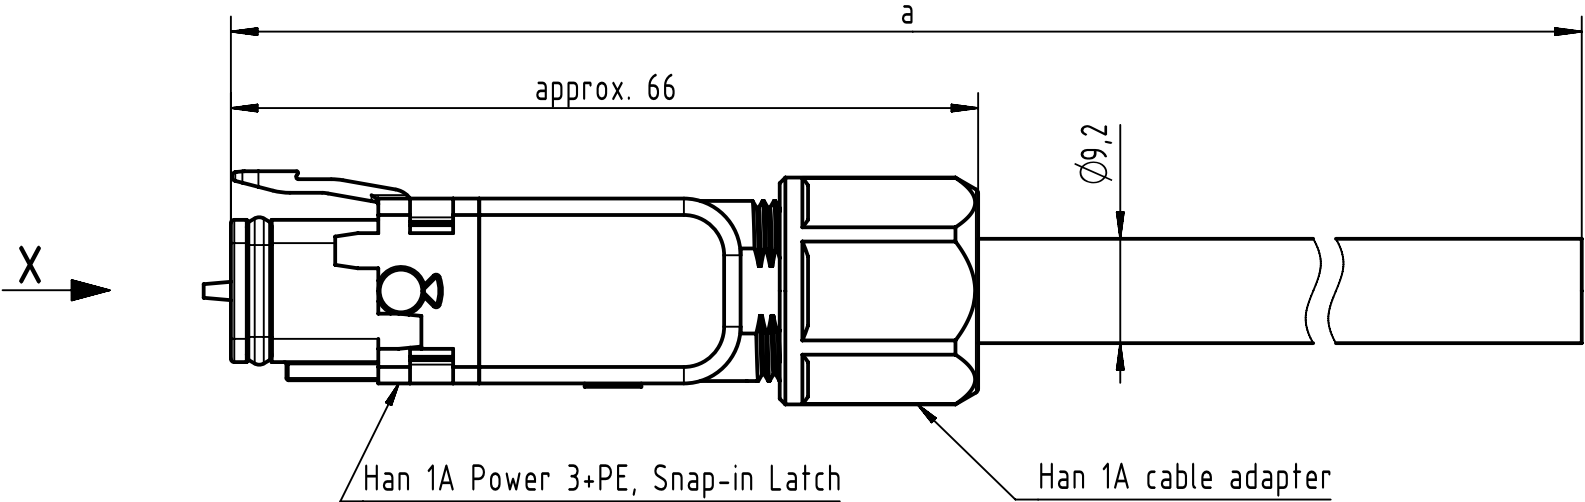

Loading Plan

1	wire 1
2	wire 2
3	wire 3
PE	green/yellow

NOTE:
* Silver plated contacts
- Protection level: IP65
- Temperature range: -30°C ... +80°C

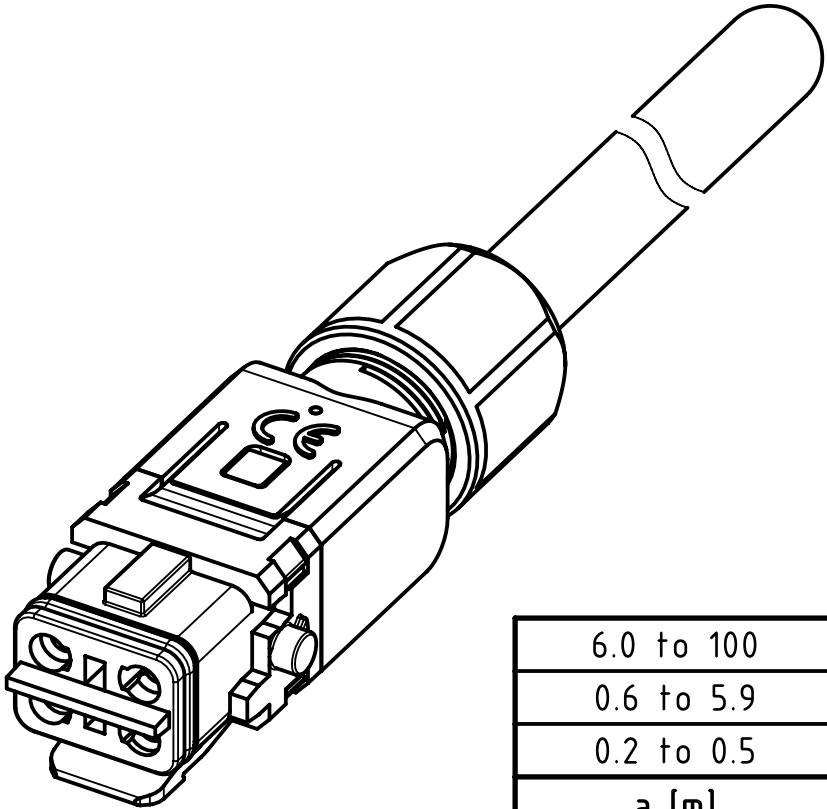

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

JZ-500 4G2.5mm², PVC, grey	33500300201XXX
Type of cable	Part no.

 All rights reserved	Tech. Character.	Free size tol.	According to production drawing
Department HCS - RO	Created by 402676 Gross	Inspected by COSTEA Costea	Standardisation MUNTEANV Muntean
HARTING Customised Solutions	Title Han1A CA 3+PE +latch f/- PVC	Date 2020-12-16	State Final Release
D-32339 Espelkamp	Type TB	Number 33500300201XXX	Doc-Key / ECM-Nr. 100838796/UGD/000/B 500000186250
		Rev. B	Page 1/1