


DCL-L 08.930.10

DecoLine | LED Strip (AKB-A1, 1xLED 11W 930/3000K 650lm)

— C0/C180 cd / 1000 lm - - - C90/C270

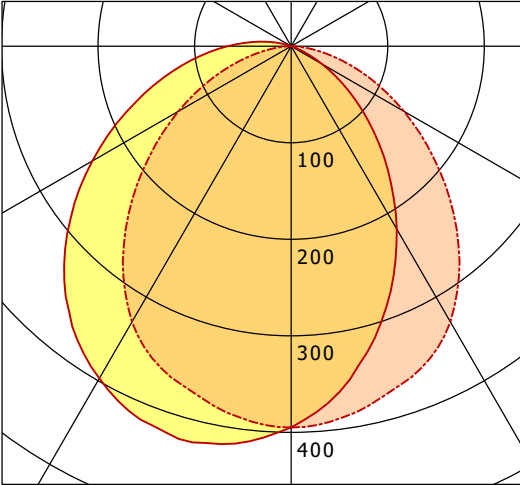

	C0	C90	C180	C270
0°	395	395	395	395
15°	321	374	423	374
30°	219	330	397	330
45°	117	236	333	236
60°	37	135	238	135
75°	0	51	143	51
90°	0	1	66	1
cd / 1000 lm				

LDC unsuitable for cone representation.
Asymmetric LDC.

η Efficiency Direct/Indirect System Power	LED 59 lm/W ↓ 98% / ↑ 2% 11 W
UGR Reflection factors UGR C0/C180 UGR C90/C270	X=4H, Y=8H 70/50/20 16.7 25.8
CIE Flux Codes Ra/CRI	50 80 94 98 100 > 90