


GLOB 450.4630.2/DALI

Globia (1xLED 47W 830/3000K 5710lm)

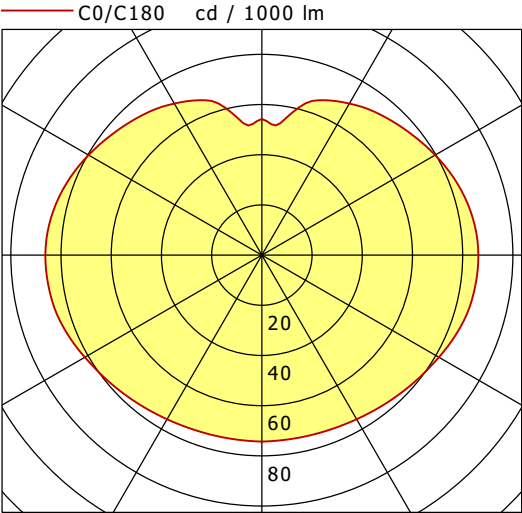

	C0	C90	C180	C270
0°	74	74	74	74
30°	76	76	76	76
60°	81	81	81	81
90°	86	86	86	86
120°	80	80	80	80
150°	70	70	70	70
180°	54	54	54	54
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	121 lm/W
Direct/Indirect	↓ 51% / ↑ 49%
System Power	47 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	24.7
UGR C90/C270	24.7
CIE Flux Codes	23 48 74 51 100
Ra/CRI	>80