


SKIM-A 102.840.1/DALI


Skive Medium | Anbau (1xLED 28W 840/4000K 2600lm)

— C0/C180 cd / 1000 lm - - - C90/C270

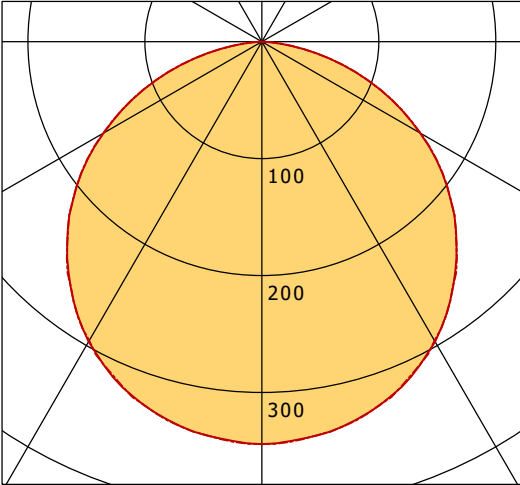

	C0	C90	C180	C270
0°	344	344	344	344
15°	332	332	332	332
30°	296	295	296	295
45°	235	235	235	235
60°	156	157	156	157
75°	66	66	66	66
90°	1	0	1	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

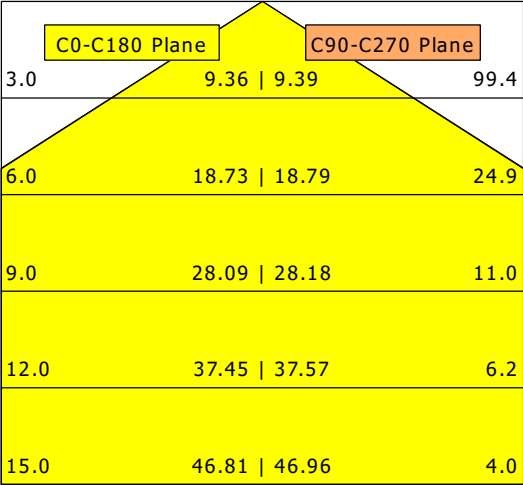

η		LED
Efficiency		93 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		28 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		23.2
UGR C90/C270		23.2
CIE Flux Codes		47 79 96 100 100
Ra/CRI		> 80