



CSARL 71.2027.25

CSA 71 Round (1xLED 21W 827/2700K 2290lm 25 °)

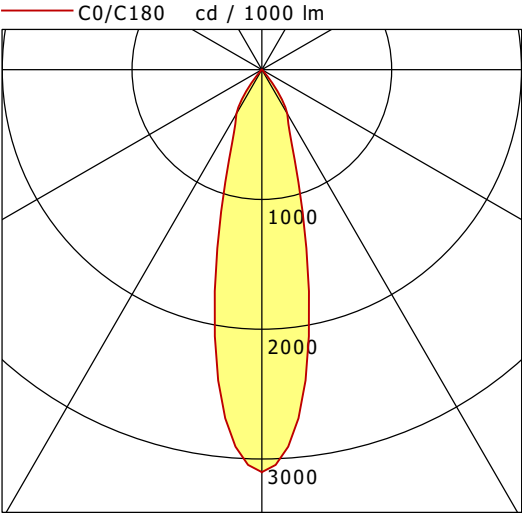

	C0	C90	C180	C270
0°	3101	3101	3101	3101
15°	1272	1272	1272	1272
30°	392	392	392	392
45°	6	6	6	6
60°	4	4	4	4
75°	3	3	3	3
90°	0	0	0	0
cd / 1000 lm				

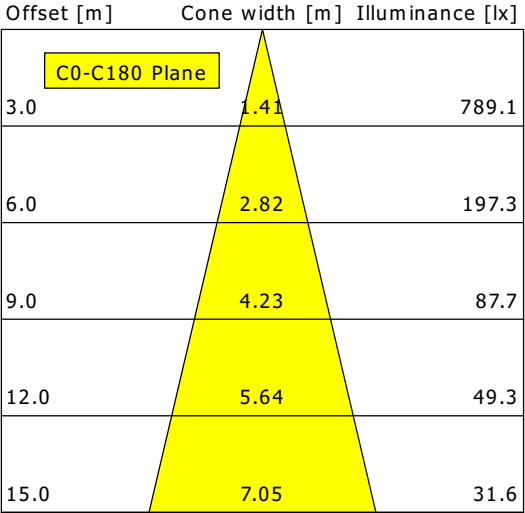

η		LED
Efficiency		109 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		21 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		17.8
UGR C90/C270		17.8
CIE Flux Codes	98 99 100 100 100	
Ra/CRI		> 80