


PLL 52.1200.30.1/DALI


PL 52 (1xLED 182W 830/3000K 25380lm)

— C0/C180 cd / 1000 lm - - - C90/C270

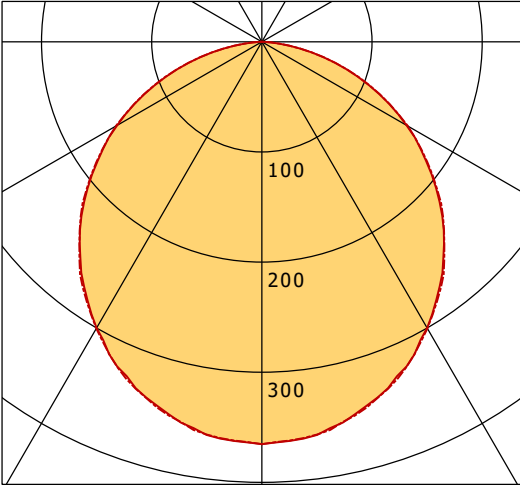

	C0	C90	C180	C270
0°	365	365	365	365
15°	346	348	346	348
30°	300	301	300	301
45°	233	233	233	233
60°	152	153	152	153
75°	63	64	63	64
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

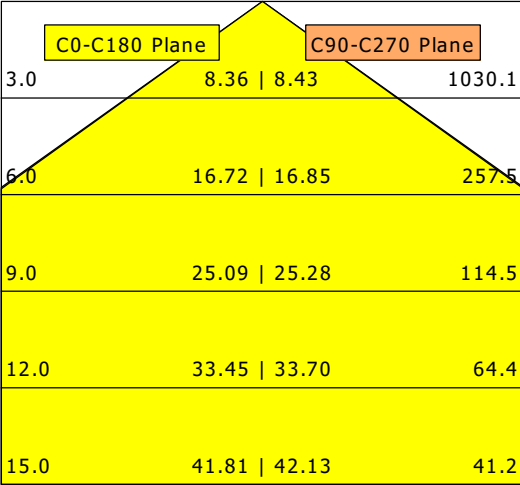

η	LED
Efficiency	139 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	182 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.3
UGR C90/C270	22.3
CIE Flux Codes	48 80 96 100 100
Ra/CRI	> 80