

## Wall mounting socket outlet - housing dimensions 126x83




| Product description           |                                              |
|-------------------------------|----------------------------------------------|
| BALS-Prd.-Nr                  | 11978                                        |
| EAN                           | 4024941119788                                |
| product category (PG)         | TE wall mounting socket outlet Quick-Connect |
| current (A)                   | 32A                                          |
| number of poles (P99)         | 3p                                           |
| number of poles (P)           | 2P+PE                                        |
| position of earth contact (H) | 9 h                                          |
| voltage (V)                   | 380 up to 415V                               |
| frequency (HZ)                | 50 and 60Hz                                  |

| Product description         |                                                                                                          |
|-----------------------------|----------------------------------------------------------------------------------------------------------|
| protection degree (SA)      | IP44                                                                                                     |
| colour code 1 (KF1)         | red RAL 3000                                                                                             |
| Colour of appliance         | Hinged lid red RAL 3000, Housing bottom grey RAL 7035, Housing top grey RAL 7035, Collar grey RAL 7035   |
| connection design (AT)      | screwless spring terminals as cage clamp with Kontex-contact                                             |
| maximum conductor size (LQ) | 10,0 qmm                                                                                                 |
| cable entry (KE)            | 1xM25 top, 2xM25 bottom                                                                                  |
| Height                      | 156mm                                                                                                    |
| Width                       | 83mm                                                                                                     |
| Depth                       | 130mm                                                                                                    |
| dimension of enclosure (GG) | 126x83 mm (HxW)                                                                                          |
| material of enclosure (GM)  | Polyamide                                                                                                |
| contact                     | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical properties |                                                             |
|---------------------------------|-------------------------------------------------------------|
|                                 | The cable entry is one at top open and two at bottom closed |
|                                 | Lower part of housing rotatable by 180°                     |
|                                 | 4 cut out fixing holes in the lower part of housing         |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.365 kg / Piece |

| Logistics data |               |
|----------------|---------------|
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941828345 |
| Length         | 330 mm        |
| Width          | 216 mm        |
| Height         | 260 mm        |
| Weight         | 3.876 kg      |
| Volume         | 17,062.5 ccm  |

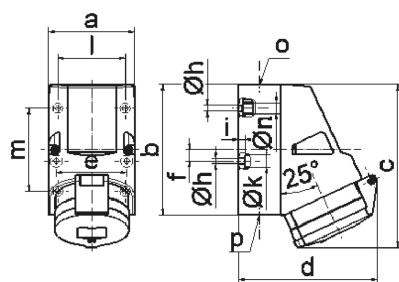

1 MB 2

| Ampere Polzahl | 16<br>4 | 16<br>5 | 32<br>3 | 32<br>4 | 32<br>5 |
|----------------|---------|---------|---------|---------|---------|
| a              | 83,0    | 83,0    | 83,0    | 83,0    | 83,0    |
| b              | 126,0   | 126,0   | 126,0   | 126,0   | 126,0   |
| c              | 153,0   | 155,0   | 155,0   | 155,0   | 155,0   |
| d              | 127,0   | 130,0   | 130,0   | 130,0   | 136,0   |
| e              | 68,0    | 68,0    | 68,0    | 68,0    | 68,0    |
| f              | 11,0    | 11,0    | 11,0    | 11,0    | 11,0    |
| h ø            | 5,5     | 5,5     | 5,5     | 5,5     | 5,5     |
| i              | 6,5     | 6,5     | 6,5     | 6,5     | 6,5     |
| k ø            | 12,0    | 12,0    | 12,0    | 12,0    | 12,0    |
| l              | 65,0    | 65,0    | 65,0    | 65,0    | 65,0    |
| m              | 80,0    | 80,0    | 80,0    | 80,0    | 80,0    |
| n ø            | 10,0    | 10,0    | 10,0    | 10,0    | 10,0    |
| o              | M25     | M25     | M25     | M25     | M25     |
| p              | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 |
| Leiter mm² min | 1,5     | 1,5     | 2,5     | 2,5     | 2,5     |
| Leiter mm² max | 4       | 4       | 10      | 10      | 10      |