


PLL 57.925.30.2/DALI


PL 57 (1xLED 112W 830/3000K 8400lm)

— C0/C180 cd / 1000 lm - - - C90/C270

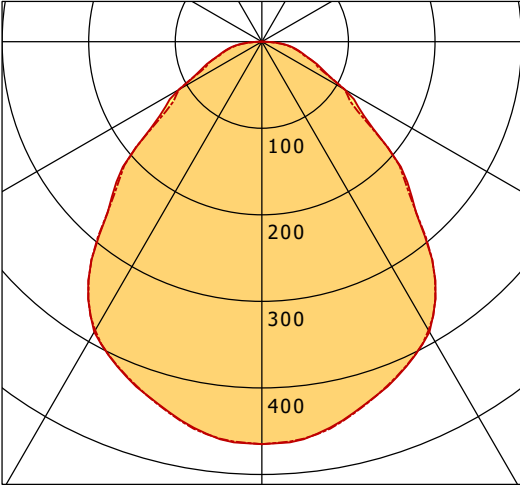

	C0	C90	C180	C270
0°	465	465	465	465
15°	438	439	438	439
30°	387	385	387	385
45°	242	237	242	237
60°	110	111	110	111
75°	47	45	47	45
90°	2	2	2	2
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

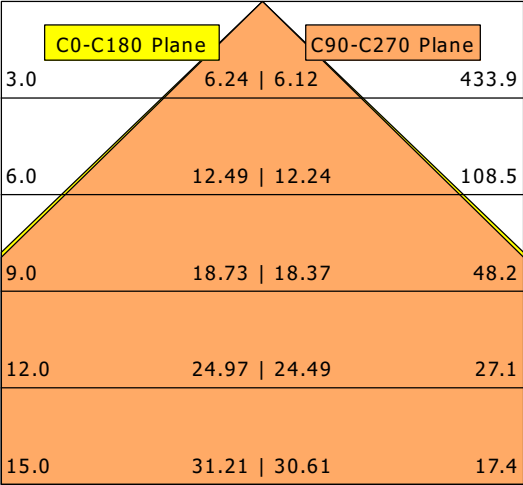

η		LED
Efficiency		75 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		112 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		18.6
UGR C90/C270		18.5
CIE Flux Codes		60 86 97 100 100
Ra/CRI		> 80