


ML-P 070.10840.2 AOV/DALI


Monoline 070 | Pendant (1xLED 17W 840/4000K 2520lm)

— C0/C180 cd / 1000 lm - - - C90/C270

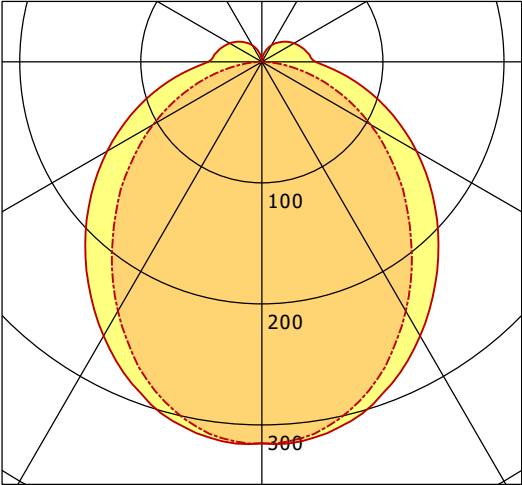

	C0	C90	C180	C270
0°	315	315	315	315
30°	262	238	262	238
60°	148	103	148	103
90°	44	1	44	1
120°	31	0	31	0
150°	16	1	16	1
180°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

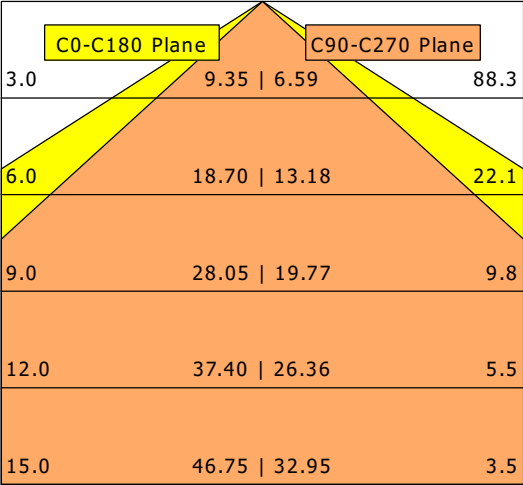

η	LED
Efficiency	148 lm/W
Direct/Indirect	↓ 89% / ↑ 11%
System Power	17 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.3
UGR C90/C270	21.5
CIE Flux Codes	46 75 92 89 100
Ra/CRI	> 80