


ILVY-CAR 100.TWL.20.WH-GO/DALI

Ilvy Cardanic (6500 K, 1xLED 14W TWL 1020lm 20°)

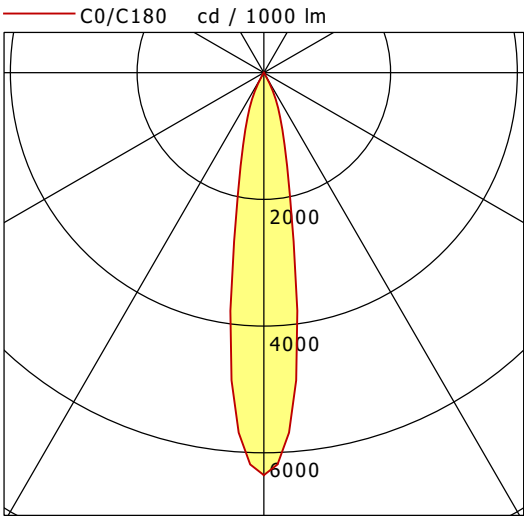

	C0	C90	C180	C270
0°	6353	6353	6353	6353
15°	1339	1339	1339	1339
30°	73	73	73	73
45°	5	5	5	5
60°	2	2	2	2
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	0.96	720.0
6.0	1.93	180.0
9.0	2.89	80.0
12.0	3.86	45.0
15.0	4.82	28.8

η		LED
Efficiency		73 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		14 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		<10.0
UGR C90/C270		<10.0
CIE Flux Codes	99 100 100 100 100	
Ra/CRI		>90