


## wall mounting appliance inlet - without closure cap

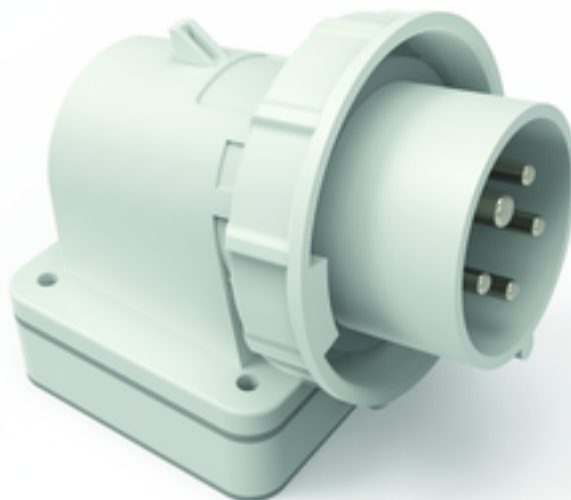


| Product description       |                                                                                                                                                                                                          |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BALS-Prd.-Nr              | 24546                                                                                                                                                                                                    |
| EAN                       | 4024941245463                                                                                                                                                                                            |
| Product category          | TE wall mounting appliance inlet QUICK-CONNECT                                                                                                                                                           |
| Current                   | 16A                                                                                                                                                                                                      |
| Number of poles           | 5p                                                                                                                                                                                                       |
| Arrangement of phases     | 3p+N+PE                                                                                                                                                                                                  |
| Position of earth contact | 1 h                                                                                                                                                                                                      |
| Voltage                   | > 50V for all other not classified voltages and/or frequencies. This time position can additionally process in special applications, in which a distinction to standardized positions needed to be used. |

| Product description    |                                                                                                           |
|------------------------|-----------------------------------------------------------------------------------------------------------|
| Protection degree      | IP67                                                                                                      |
| Colour code            | grey RAL 7035                                                                                             |
| Colour of appliance    | Collar grey RAL 7035, Bayonet ring grey RAL 7035, Housing bottom grey RAL 7035, Housing top grey RAL 7035 |
| Connection design      | screwless spring-clamp technology                                                                         |
| Maximum conductor size | 2,5 qmm                                                                                                   |
| Cable entry            | top entry M20                                                                                             |
| Height                 | 129mm                                                                                                     |
| Width                  | 86mm                                                                                                      |
| Depth                  | 111mm                                                                                                     |
| Dimension of enclosure | 84x84 mm                                                                                                  |
| Material of enclosure  | Polyamide                                                                                                 |
| Contacts               | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated  |

| Additional technical properties |                                                              |
|---------------------------------|--------------------------------------------------------------|
|                                 | The cable entry is one at top open and one rear sided closed |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.265 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |

| Logistics data |               |
|----------------|---------------|
| EAN            | 4024941245463 |
| Length         | 111 mm        |
| Width          | 86 mm         |
| Height         | 129 mm        |
| Weight         | 0.266 kg      |
| Volume         | 1,044.9 ccm   |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941226653 |
| Length         | 325 mm        |
| Width          | 217 mm        |
| Height         | 210 mm        |
| Weight         | 2.856 kg      |
| Volume         | 13,588.4 ccm  |

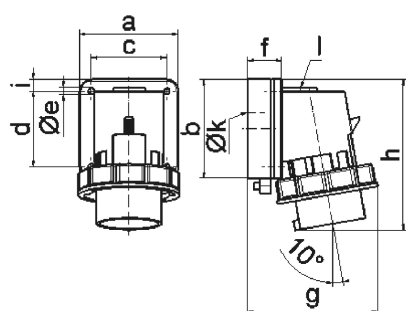

5 MB 129

| Ampere  | 16    | 32    |  |  |  |  |
|---------|-------|-------|--|--|--|--|
| Polzahl | 5     | 5     |  |  |  |  |
| a       | 84,0  | 90,0  |  |  |  |  |
| b       | 84,0  | 75,0  |  |  |  |  |
| c       | 64,0  | 78,0  |  |  |  |  |
| d       | 64,0  | 45,0  |  |  |  |  |
| e ø     | 5,5   | 5,5   |  |  |  |  |
| f       | 28,0  | 28,0  |  |  |  |  |
| g       | 111,0 | 123,0 |  |  |  |  |
| h       | 136,0 | 139,0 |  |  |  |  |
| i       | 10,0  | 13,0  |  |  |  |  |
| k ø     | 23,0  | 29,0  |  |  |  |  |
| l       | M20   | M25   |  |  |  |  |
|         |       |       |  |  |  |  |
|         |       |       |  |  |  |  |

