


CHOCM-P 107.1618.830/DALI


Choc Medium | Pendant (1xLED 67W 830/3000K 7250lm)

— C0/C180 cd / 1000 lm - - - C90/C270

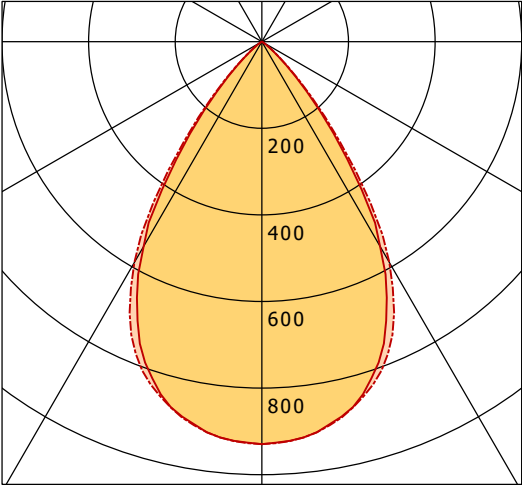

	C0	C90	C180	C270
0°	929	929	929	929
15°	859	861	859	861
30°	546	589	546	589
45°	95	103	95	103
60°	1	1	1	1
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

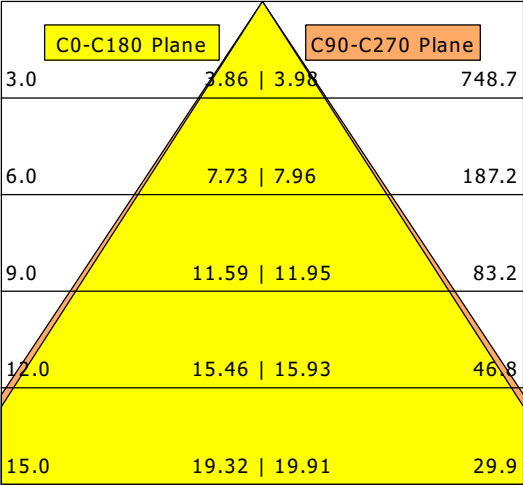

η		LED
Efficiency		108 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		67 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		18.6
UGR C90/C270		18.6
CIE Flux Codes	90 100 100 100 100	
Ra/CRI		> 80