


TIBI-P 600.5840/DALI

Tibi Pendant (1xLED 50W 840/4000K 5820lm)

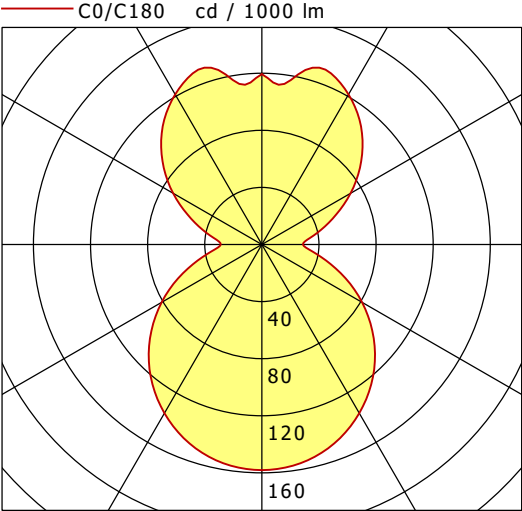

	C0	C90	C180	C270
0°	158	158	158	158
30°	136	136	136	136
60°	81	81	81	81
90°	29	29	29	29
120°	72	72	72	72
150°	121	121	121	121
180°	119	119	119	119
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	116 lm/W
Direct/Indirect	↓ 53% / ↑ 47%
System Power	50 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.9
UGR C90/C270	18.9
CIE Flux Codes	41 71 89 53 100
Ra/CRI	> 80