


ML-E 070.11840.3 AOB/DALI


Monoline 070 | Recessed (1xLED 32W 840/4000K 5130lm)

— C0/C180 cd / 1000 lm - - - C90/C270

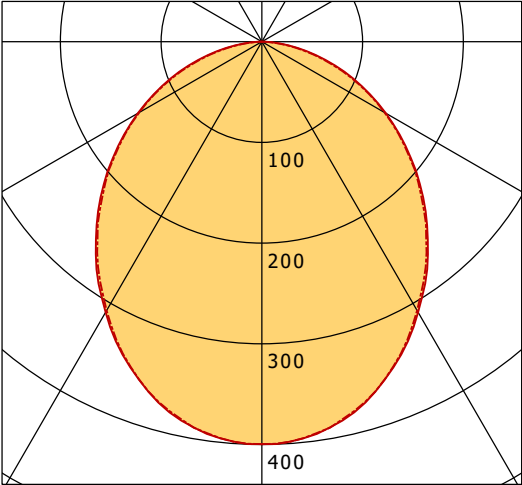

	C0	C90	C180	C270
0°	400	400	400	400
15°	376	375	376	375
30°	310	308	310	308
45°	228	226	228	226
60°	142	141	142	141
75°	61	58	61	58
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

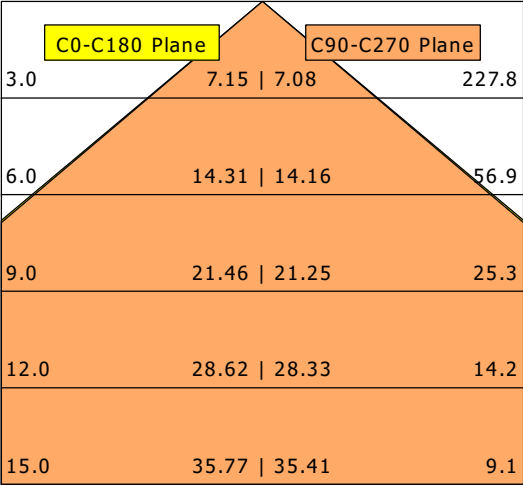

η		LED
Efficiency		160 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		32 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		26.1
UGR C90/C270		26.0
CIE Flux Codes		50 81 96 100 100
Ra/CRI		> 80