


SCOUT 204.940.OR46/DALI-ST


Scout Next (1xLED 38W 940/4000K 4280lm)

— C0/C180 cd / 1000 lm - - - C90/C270

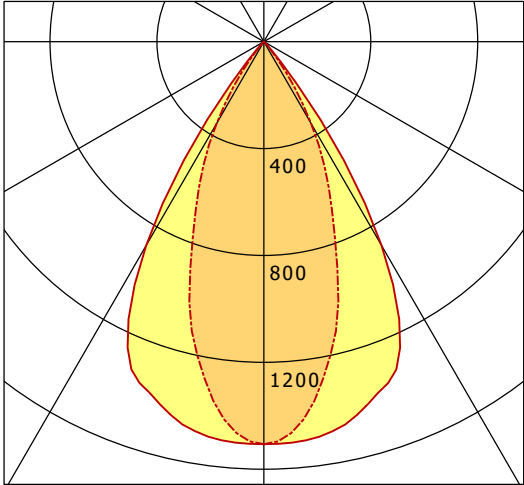

	C0	C90	C180	C270
0°	1506	1506	1506	1506
15°	1426	1067	1426	1067
30°	881	353	881	353
45°	15	5	15	5
60°	2	2	2	2
75°	1	1	1	1
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

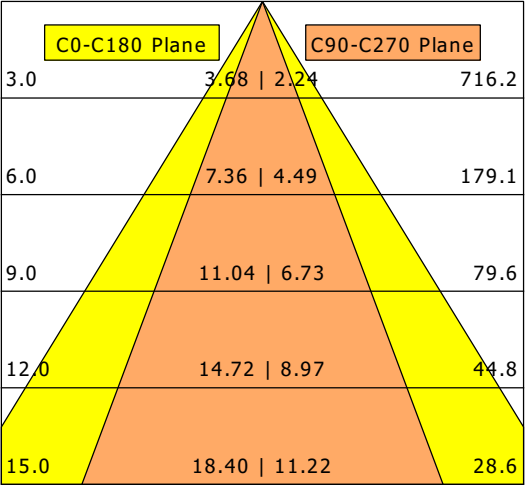

η		LED
Efficiency		113 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		38 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		24.1
UGR C90/C270		18.9
CIE Flux Codes	99 100 100 100 100	
Ra/CRI		> 90