


# PLL 25.385.30.1/DALI

PL 25 (1xLED 22W 830/3000K 1800lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

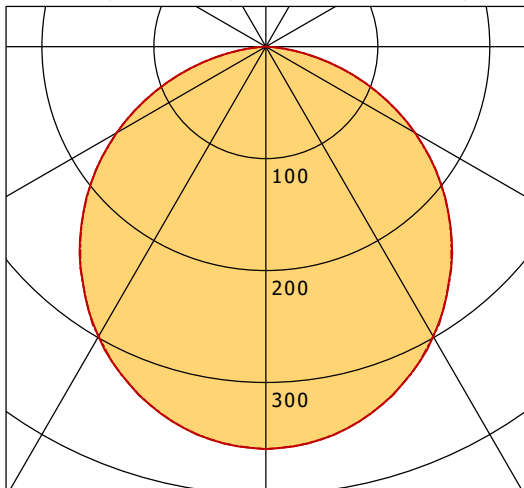

	C0	C90	C180	C270
0°	360	360	360	360
15°	343	343	343	343
30°	299	299	299	299
45°	234	234	234	234
60°	154	154	154	154
75°	64	64	64	64
90°	0	0	0	0
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

Offset [m]	C0-C180 Plane	C90-C270 Plane	Illuminance [lx]
3.0	8.70	8.71	71.9
6.0	17.41	17.41	18.0
9.0	26.11	26.12	8.0
12.0	34.82	34.82	4.5
15.0	43.52	43.53	2.9

<b>η</b>	LED
Efficiency	82 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	22 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.1
UGR C90/C270	22.0
CIE Flux Codes	48 79 96 100 100
Ra/CRI	>80