


LUZ-T32 110.840.BW

LUZ | Track-Mounted (1xLED 65W 840/4000K 10170lm)

— C0/C180 cd / 1000 lm - - - C90/C270

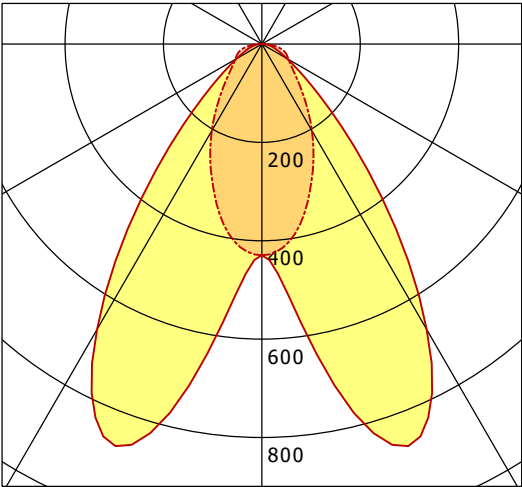

	C0	C90	C180	C270
0°	430	430	430	430
15°	800	346	800	346
30°	670	203	670	203
45°	213	102	213	102
60°	59	63	59	63
75°	22	43	22	43
90°	4	2	4	2
cd / 1000 lm				

LDC unsuitable for cone representation.
The C90 angle is oversized.

η Efficiency Direct/Indirect System Power	LED 156 lm/W ↓ 99% / ↑ 1% 65 W
UGR Reflection factors UGR C0/C180 UGR C90/C270	X=4H, Y=8H 70/50/20 22.7 24.4
CIE Flux Codes Ra/CRI	72 91 98 99 100 > 80