


The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages and/or costs incurred by the grant of a patent, utility model or design. (ISO 9696)



1:1

⑤



Litzenquerschnitt: 0.14mm² / 0.25mm² / AWG 24

*Länge L siehe Materialstamm (SAP)		
L	Längentoleranz	Litzenzuschnitt
0-50mm	L ± 5	L + 7
51-999mm	L ± 10	L + 10
ab 1000mm	L ± 50	L + 10

Belegung	
Pol.	Farbe
1	braun
2	weiß
3	blau
4	schwarz

Montageausschnitt und Anzugsmomente siehe 05-0319-000

Technische Daten siehe 06-7180-0001

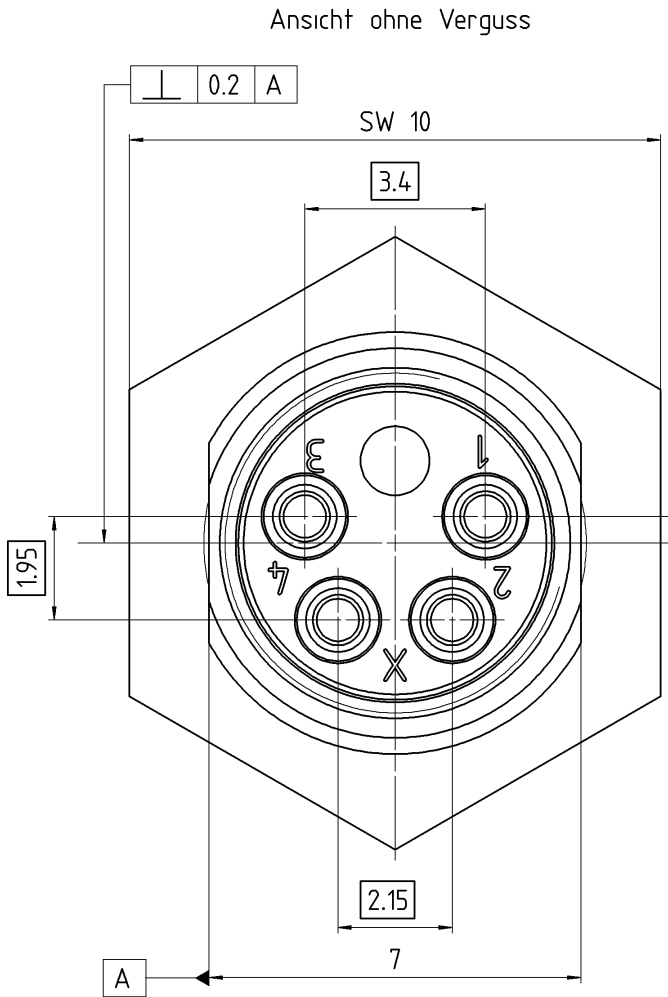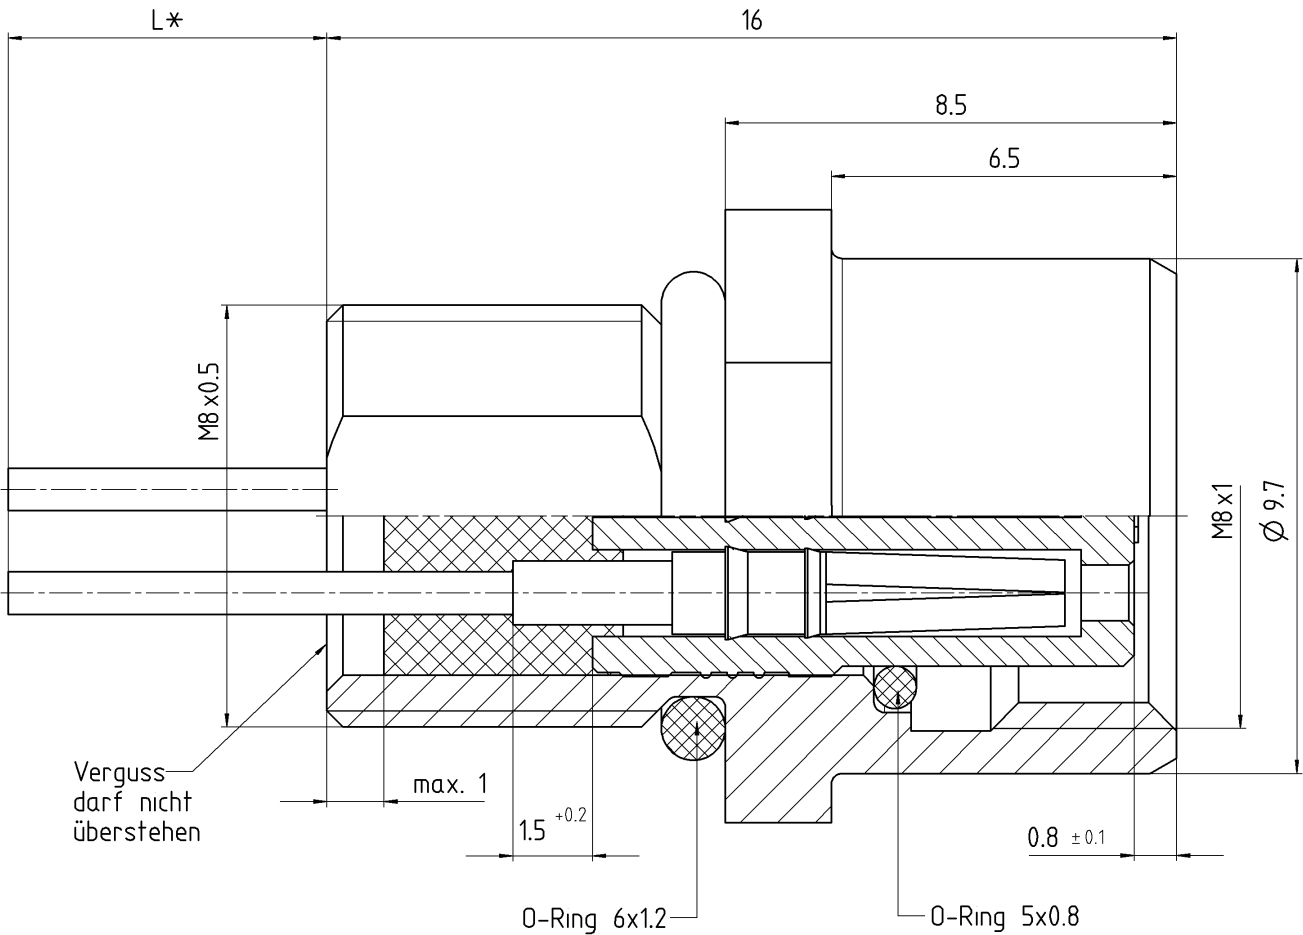

Werkstoff		Nr.		Index	
PHENIX CONTACT		Schutzvermerk		Maße ohne Toleranzang. ISO 2768-m	
Volumen Masse		Datum		Name	
Bearb.		Gepr.		Norm	
Serie:		Zeichnungs-Nr.		Blatt	
Index		Änderung		Datum	
Name		Ers.d.		von	

1500363 SACC-E-M 8FS-4CON-M8/0,5