



CSA-R 402.940.MF/DALI

CSA 40 Generation 2 (1xLED 20W 940/4000K 2660lm 23°)

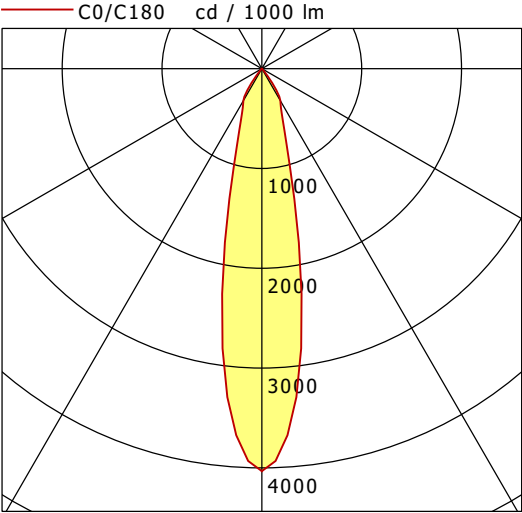

	C0	C90	C180	C270
0°	4033	4033	4033	4033
15°	1167	1167	1167	1167
30°	371	371	371	371
45°	13	13	13	13
60°	5	5	5	5
75°	1	1	1	1
90°	0	0	0	0
cd / 1000 lm				

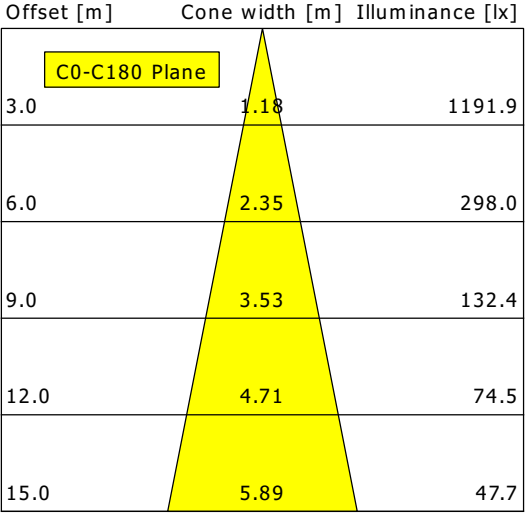

η		LED
Efficiency		133 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		20 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		18.7
UGR C90/C270		18.7
CIE Flux Codes	98 100 100 100 100	
Ra/CRI		> 90