


## Matric-RX

Pendant light-line - Direct/indirect light distribution

Article code: LRXOEE-830M-L2055-A

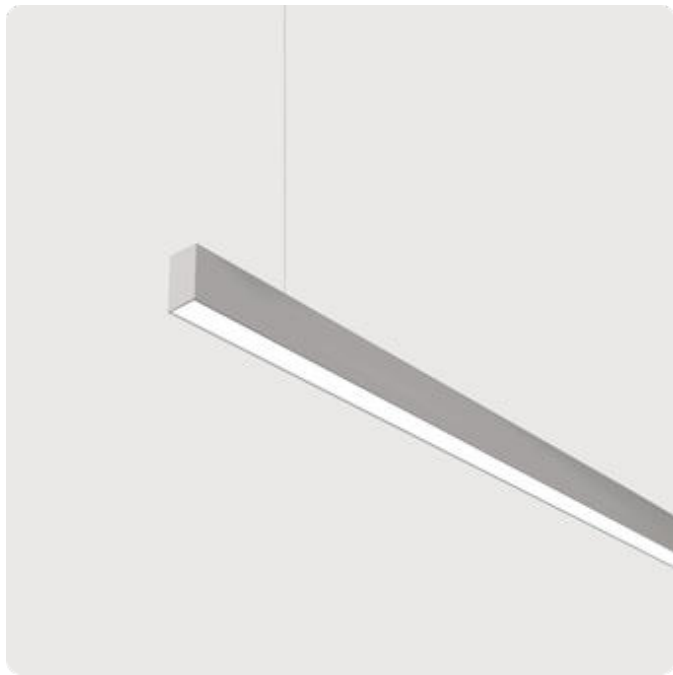

Illustrations may only be similar and serve as an orientation.


Matric-RX. LED. Pendant light-line. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Switchable. LxWxH (rectangular). L=2055mm. W=40mm. H=75mm. Single-cord suspension (Set). Pendant length max 1500mm. Power supply: transparent. Ceiling rose: Matching luminaire`s surface

colour. Medium-power current. 6928lm. 58W. 5,4kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

## Matric-RX

Pendant light-line - Direct/indirect light distribution

Article code: LRXOEE-830M-L2055-A



Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

|                              |                                                   |
|------------------------------|---------------------------------------------------|
| Productname                  | Matric-RX                                         |
| Lamp                         | LED                                               |
| Installation Type            | Pendant light-line                                |
| Surface finish               | Silver Anodised                                   |
| Light characteristics        | Direct/indirect light distribution                |
| Colour temperature           | 3000K                                             |
| Colour Rendering Index (CRI) | CRI>80                                            |
| Optical system               | Opal diffuser                                     |
| Control                      | Switchable                                        |
| Length L/Diameter D (mm)     | L=2055mm                                          |
| Width W (mm)                 | W=40mm                                            |
| Height H (mm)                | H=75mm                                            |
| Current/Power                | Medium-Power                                      |
| Luminous Flux                | 6928lm                                            |
| Power consumption            | 58W                                               |
| Suspension                   | Single susp. (Set)                                |
| Ceiling rose colour          | Ceiling rose: Matching luminaire`s surface colour |
| Pendant length (mm)          | Pendant length max 1500mm                         |
| Degree of protection         | IP20                                              |
| Certification                | Prüfzeichen: ENEC                                 |
| Cable Colour                 | Power supply: transparent                         |
| LED lifetime                 | L85B10 (tq 25°C) = 50.000h                        |
| Photometric code             | 8 30 / 3 3 9                                      |
| Photobiological class        | RG0 (EN62471)                                     |
| Indoor/Outdoor               | Indoor: ta [ambient] max. 25°C                    |
| Weight (kg)                  | 5,4kg                                             |

