

Matric-SX

Free standing luminaire - Direct/indirect light distribution

Article code: LSXLSM-840M-L1570-UA-A



Illustrations may only be similar and serve as an orientation.

Matric-SX. LED. Free standing luminaire with one luminaire head. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre for wide and symmetrical light distribution. High glare limitation, compatible for office applications. UGR<=19. Reflector: Satin Silver. Continuously dimmable multisensor as stand-alone-version. LxWxH (luminaire head, rectangular/Stand). L= 1570mm. W=



40mm. H=2200/40mm. Medium-power current. 10100lm. 66W. 23,8kg. Binning initial <= MacAdam 3. U-formed floor base matching luminaire`s outer surface colour. Plug Schuko CEE 7/7 (Type E+F). IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 and 50001:2018 certified.

lightnet

Matric-SX

Free standing luminaire - Direct/indirect light distribution

Article code: LSXLSM-840M-L1570-UA-A

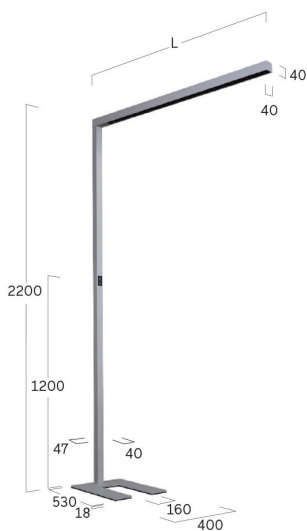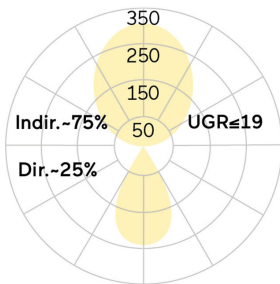

Customer / Project: _____

Note: _____

Productname	Matric-SX
Lamp	LED
Installation Type	Free standing luminaire
Surface finish	Radiant Silver
Light characteristics	Direct/indirect light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Lens Louvre
Reflector Colour Inside	Reflector: Satin Silver
Control	Dim-Multisensor
Length L/Diameter D (mm)	L=1570mm
Width W (mm)	W=40mm
Height H (mm)	H=2200/40mm
Current/Power	Medium-Power
Luminous Flux	10100lm
Power consumption	66W
Base-Type	U-base
Plug	Schuko CEE 7/7 (E+F)
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	23,8kg

