

## Panel mounting socket outlet, angled - flange 114x114, fixing centers 90x90




| Product description       |                                         |
|---------------------------|-----------------------------------------|
| BALS-Prd.-Nr              | 12055                                   |
| EAN                       | 4024941120555                           |
| Product category          | TE panel mounting socket outlet, angled |
| Current                   | 125A                                    |
| Number of poles           | 5p                                      |
| Poles                     | 3p+N+PE                                 |
| Position of earth contact | 2 h                                     |
| Voltage                   | > 50V                                   |

| Product description            |                                                                                                          |
|--------------------------------|----------------------------------------------------------------------------------------------------------|
| Frequency                      | over 300 up to 500Hz                                                                                     |
| Protection degree              | IP67                                                                                                     |
| Colour code                    | green RAL 6002                                                                                           |
| Colour of appliance            | Hinged lid green RAL 6002, Bayonet ring grey RAL 7035, Enclosure grey RAL 7035                           |
| Connection design              | screw terminal as box terminal with Kontex-contact                                                       |
| Maximum conductor size         | 70.0 qmm                                                                                                 |
| Cable entry                    | other                                                                                                    |
| Height                         | 135mm                                                                                                    |
| Width                          | 125mm                                                                                                    |
| Depth                          | 172mm                                                                                                    |
| Flange size vertical           | 114mm                                                                                                    |
| Flange size horizontal         | 114mm                                                                                                    |
| Drill hole distance vertical   | 90mm                                                                                                     |
| Drill hole distance horizontal | 90mm                                                                                                     |
| Material of enclosure          | Polyamide                                                                                                |
| Contact                        | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical properties |                        |
|---------------------------------|------------------------|
|                                 | The inclination is 15° |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 1.01 kg / Piece |
| Packaging      | Bag             |
| Content amount | 1 ST            |
| EAN            | 4024941120555   |
| Length         | 172 mm          |
| Width          | 125 mm          |
| Height         | 135 mm          |
| Weight         | 1.011 kg        |
| Volume         | 2,902.5 ccm     |
| Packaging      | Carton          |
| Content amount | 5 ST            |
| EAN            | 4024941830973   |
| Length         | 325 mm          |
| Width          | 217 mm          |
| Height         | 210 mm          |
| Weight         | 5.256 kg        |
| Volume         | 13,588.4 ccm    |

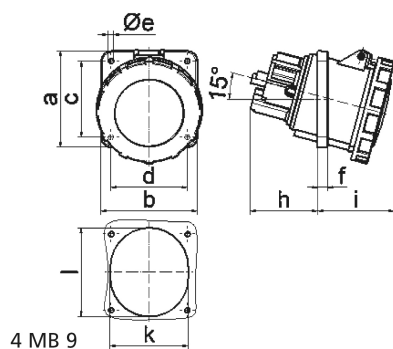

| Ampere<br>Polzahl | 125<br>3 | 125<br>4 | 125<br>5 |  |  |  |
|-------------------|----------|----------|----------|--|--|--|
| a                 | 114,0    | 114,0    | 114,0    |  |  |  |
| b                 | 114,0    | 114,0    | 114,0    |  |  |  |
| c                 | 90,0     | 90,0     | 90,0     |  |  |  |
| d                 | 90,0     | 90,0     | 90,0     |  |  |  |
| e ø               | 6,5      | 6,5      | 6,5      |  |  |  |
| f                 | 12,0     | 12,0     | 12,0     |  |  |  |
| h                 | 82,0     | 82,0     | 82,0     |  |  |  |
| i                 | 90,0     | 90,0     | 90,0     |  |  |  |
| k                 | 92,0     | 92,0     | 92,0     |  |  |  |
| l                 | 105,0    | 105,0    | 105,0    |  |  |  |
| Leiter mm² min    | 25       | 25       | 25       |  |  |  |
| Leiter mm² max    | 70       | 70       | 70       |  |  |  |
|                   |          |          |          |  |  |  |