


LUZ-A23 110.840.60


LUZ | Surface-Mounted (1xLED 65W 840/4000K 10140lm 60°)

— C0/C180 cd / 1000 lm - - - C90/C270

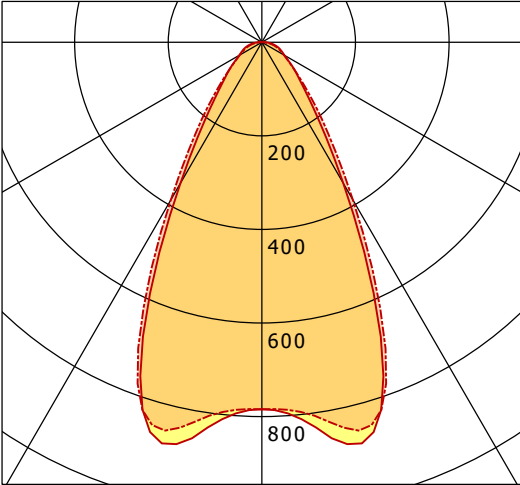

	C0	C90	C180	C270
0°	784	784	784	784
15°	878	856	878	856
30°	348	389	348	389
45°	115	125	115	125
60°	56	54	56	54
75°	33	27	33	27
90°	7	1	7	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

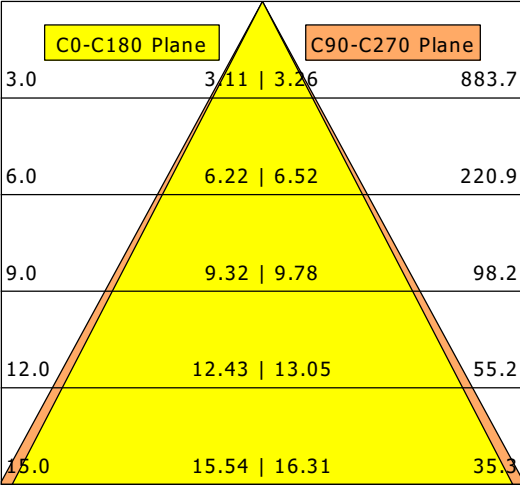

η		LED
Efficiency		156 lm/W
Direct/Indirect		↓ 99% / ↑ 1%
System Power		65 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		23.0
UGR C90/C270		22.7
CIE Flux Codes		76 90 97 99 100
Ra/CRI		> 80