
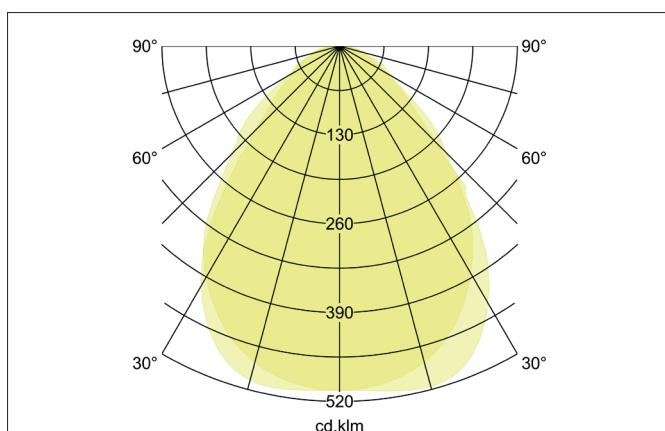
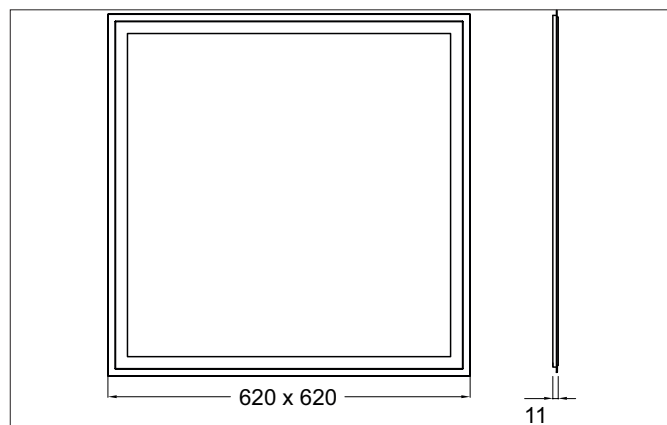


AGGY LED panel 620 x 620 mm MP

Article no. 32055073

Light.
For Generations.**Tender**

LED panel 620 x 620 mm MP, Square. Recessed luminaire for ceilings with visible mounting rails. Ceiling cut-out L x W 620 x 620 mm, Installation depth 11 mm, Length 620 mm, Width 620 mm, Weight 2,900 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, microprismatic cover. Luminous flux 4.000 lm, UGR < 19, Power 1 x 32 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 100.000 h, Rated life time L80/B10 at 25 °C: 50.000 h, Housing material: Aluminium / PMMA, Colour: White, Permissible ambient temperature (ta): -20 °C to +45 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP40, shock resistance according to IEC62262: IK04 .With electronic driver, on/off switchable.

AGGY LED panel 620 x 620 mm MP

Article no. 32055073

Light.
For Generations.

Article data	
Article no.	32055073
GTIN	4251433998495
Series name	AGGY
Short description	LED panel 620 x 620 mm MP
Material	Aluminium / PMMA
Colour	White
Shape	Square
Built-in width	620 mm
Built-in length	620 mm
Installation depth	11 mm
Length	620 mm
Width	620 mm
Hight	11 mm
Scope of delivery	incl. multilumen driver. 800 mA; 900 mA; 950 mA; 1.050 mA
Weight	2.900 kg

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	4,000 lm
System efficiency	125 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Reflector	Without
Beam angle	85°
Glare evaluation	UGR < 19
Light sharing	Symmetric
Photobio. Risikogruppe nach EN 62778	RG0
Adjustable color temperature	No

Operating technology of the luminaire	
System output	32 W
Voltage type	AC/DC
AC nominal voltage min	198 V
AC nominal voltage max	264 V
DC nominal voltage min	197 V
DC nominal voltage max	278 V
Current	
Frequenz max.	60 Hz
Frequenz min.	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	II
Degree of protection	IP40
Ambient temperature	-20°C bis +45°C
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Glühdrahtprüfung nach IEC 60695-2-12	650°C
Rated life time L70/B50 at 25 °C	100,000 h

AGGY LED panel 620 x 620 mm MP

Article no. 32055073

Light.
For Generations.

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Impact resistance	IK04
stamp	ENEC D-Kennzeichen
Further references	No cover with thermal insulation material
Material cover	Plastic, microprismatic
Suitable for through-wiring	Yes

Packing data	
Gross weight	3.2 kg
Length of packaging	640 mm
Packaging width	635 mm
Packaging height	35 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>

Accessories	
-------------	--