



SCELP 401.2030.25/DALI

Scene 4 (1xLED 27W 830/3000K 2700lm 25 °)

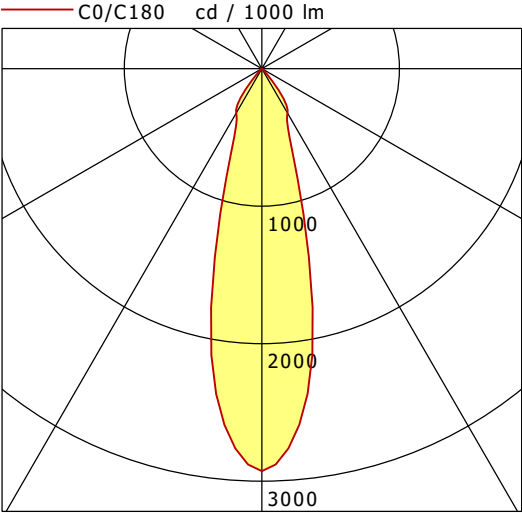

	C0	C90	C180	C270
0°	2927	2927	2927	2927
15°	1248	1248	1248	1248
30°	373	373	373	373
45°	24	24	24	24
60°	3	3	3	3
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

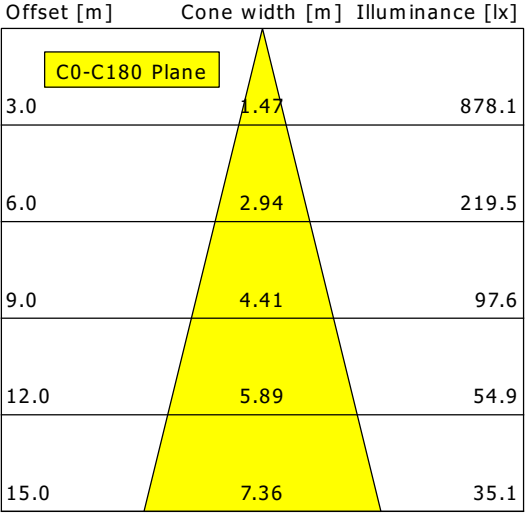

η		LED
Efficiency		100 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		27 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		19.2
UGR C90/C270		19.2
CIE Flux Codes	97 100 100 100 100	
Ra/CRI		> 80