


SCELP 401.3027.25/DALI

Scene 4 (1xLED 36W 827/2700K 3410lm 25 °)

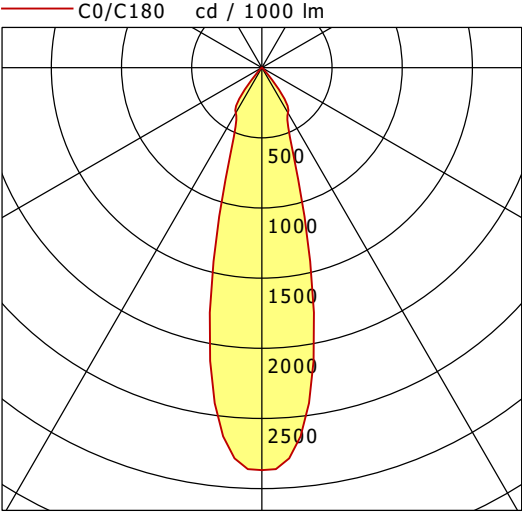

	C0	C90	C180	C270
0°	2868	2868	2868	2868
15°	1257	1257	1257	1257
30°	372	372	372	372
45°	22	22	22	22
60°	3	3	3	3
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	1.50	1086.8
6.0	2.99	271.7
9.0	4.49	120.8
12.0	5.98	67.9
15.0	7.48	43.5

η		LED
Efficiency		95 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		36 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		20.0
UGR C90/C270		20.0
CIE Flux Codes	98 100 100 100 100	
Ra/CRI		> 80