



STRL 611.830.1405/DALI

StraitLine | Light-Module (Batwing/Wide Beam nanoOptix, 1xLED 32W 830/3000K 5020lm)

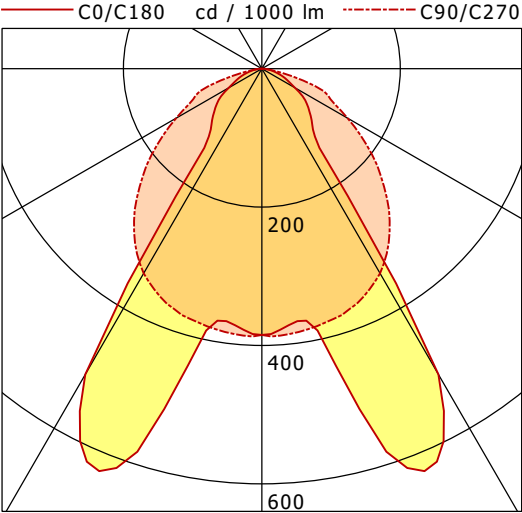

	C0	C90	C180	C270
0°	385	385	385	385
15°	476	377	476	377
30°	510	342	510	342
45°	101	253	101	253
60°	55	143	55	143
75°	21	53	21	53
90°	0	0	0	0
cd / 1000 lm				

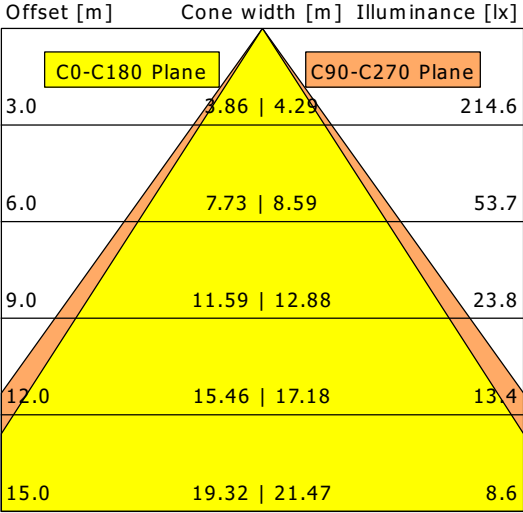

η		LED
Efficiency		157 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		32 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		20.6
UGR C90/C270		27.0
CIE Flux Codes		64 90 98 100 100
Ra/CRI		> 80