
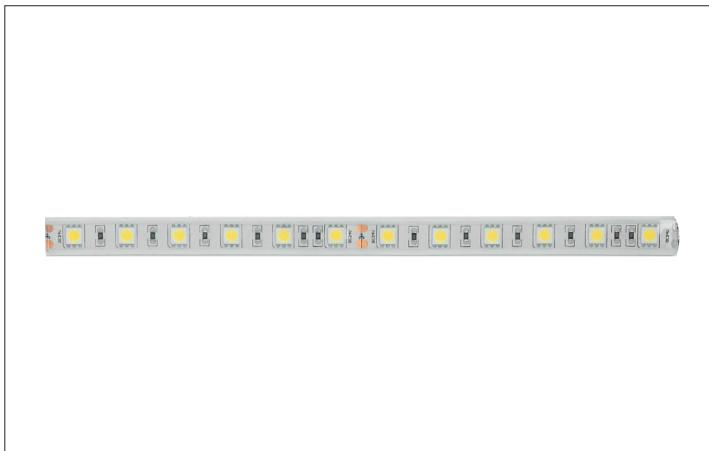


QualityFlex Select flex lighting 5 m, CRI &gt; 90, 14,4 W / m, IP67

**Artikel-Nr. 15273005**

QualityFlex Select flex lighting 5 m, CRI > 90, 14,4 W / m, IP67, white, 6.000K, CRI > 90. LED flex lighting for decorative, technical as well as efficient lighting of light coves, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. Länge: 5000.0 mm Lampenleistung je Meter: 14.4 W/m, Lichtstrom je Meter: 1160.0 lm/m, Schutzart raumseitig: IP67, Schutzklasse: III, Spannung: 24V DC, Abstrahlwinkel: 120.0 °, 60 LEDs pro Meter, Chip-Abstand (Short Pitch) : 16,7mm. Zur Individuellen Anwendung kann die LED-Flexplatine alle 100 mm eingekürzt werden. Bei Kürzung der LED-Flexplatine muss der IP-Schutz bauseits wiederhergestellt werden. Die maximale Systemlänge von 5.000mm darf mit einer Einspeisung nicht überschritten werden. This luminaire contains incorporated and non-exchangeable LED light sources.

<b>Artikel-Nr.</b>	<b>15273005</b>
<b>Stand:</b>	06.12.2021 17:31

Colour temperature	6000 K
Light colour	White
Luminous flux per meter	1,160 lm/m
Power	72 W
Lamp power per meter	14.4 W/m
Power fix	72 W
Beam angle	120 °
Length	5,000 mm
Width	12.7 mm
Aufbauhöhe	4.8 mm
Length of individual sections	100 mm
Degree of protection	IP67

Protection class	III
McAdam-Step	McAdam-Step 5
Short Pitch	16.7 mm
Number of lamps per meter	60 Qty
Voltage	24V
Voltage type	DC
Ambient temperature	-10 °C bis +40 °C
Control	Dimming depending on driver
Circuit type	Parallel conduction
Length of the connection line	350 mm
Maximum module length	5,000 mm