


# LUNM 304.830.1/DALI


Lunata Medium (1xLED 38W 830/3000K 4570lm)

— C0/C180    cd / 1000 lm    - - - C90/C270

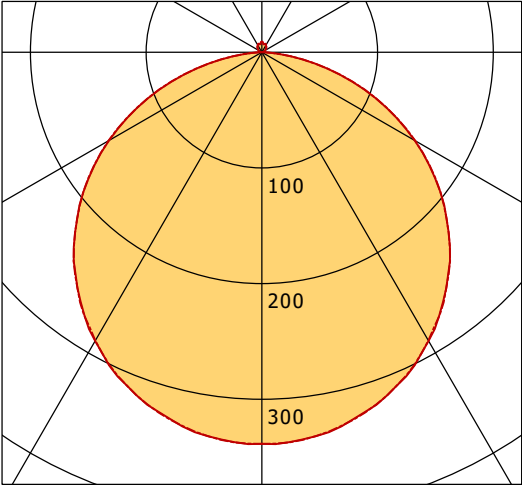

|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 339 | 339 | 339  | 339  |
| 15°          | 325 | 326 | 325  | 326  |
| 30°          | 288 | 288 | 288  | 288  |
| 45°          | 229 | 229 | 229  | 229  |
| 60°          | 153 | 153 | 153  | 153  |
| 75°          | 64  | 64  | 64   | 64   |
| 90°          | 1   | 1   | 1    | 1    |
| cd / 1000 lm |     |     |      |      |

Offset [m]    Cone width [m]    Illuminance [lx]

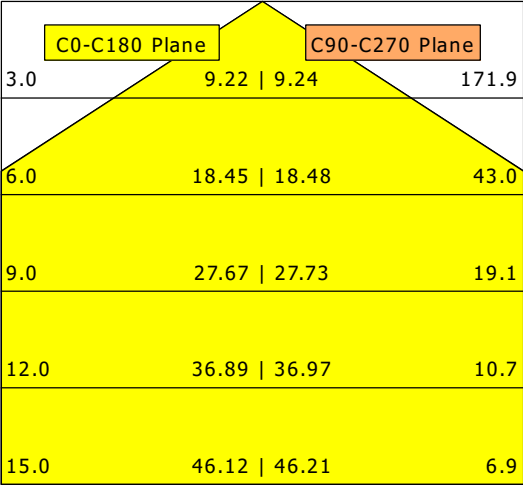

|                    |                 |
|--------------------|-----------------|
| <b>η</b>           | LED             |
| Efficiency         | 120 lm/W        |
| Direct/Indirect    | ↓ 98% / ↑ 2%    |
| System Power       | 38 W            |
| <b>UGR</b>         | X=4H, Y=8H      |
| Reflection factors | 70/50/20        |
| UGR C0/C180        | 19.5            |
| UGR C90/C270       | 19.5            |
| CIE Flux Codes     | 47 79 96 98 100 |
| Ra/CRI             | > 80            |