


VFCL 700.2530/DALI


Vario Classic (1xLED 27W 830/3000K 2610lm 80 °)

— C0/C180 cd / 1000 lm - - - C90/C270

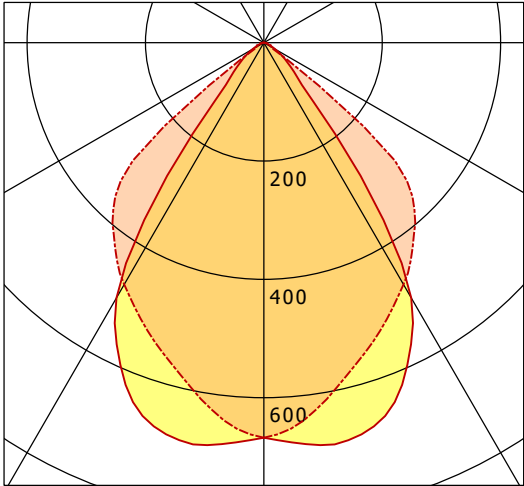

	C0	C90	C180	C270
0°	668	668	668	668
15°	679	572	679	572
30°	498	472	498	472
45°	76	350	76	350
60°	22	15	22	15
75°	4	11	4	11
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

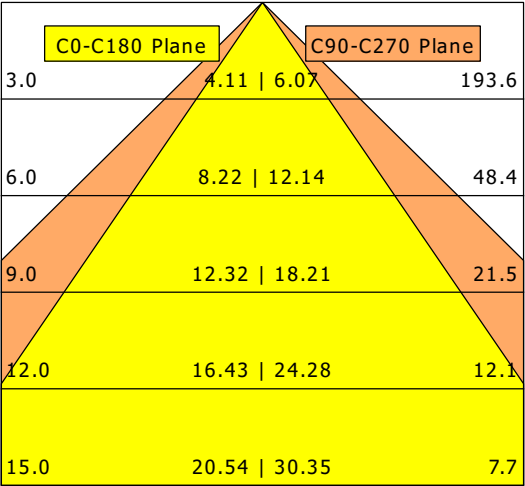

η		LED
Efficiency		97 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		27 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		22.2
UGR C90/C270		26.3
CIE Flux Codes		78 98 100 100 100
Ra/CRI		>80