


LUNXXS 200.830.1/DALI


Lunata XXSmall (1xLED 13W 830/3000K 1060lm)

— C0/C180 cd / 1000 lm - - - C90/C270

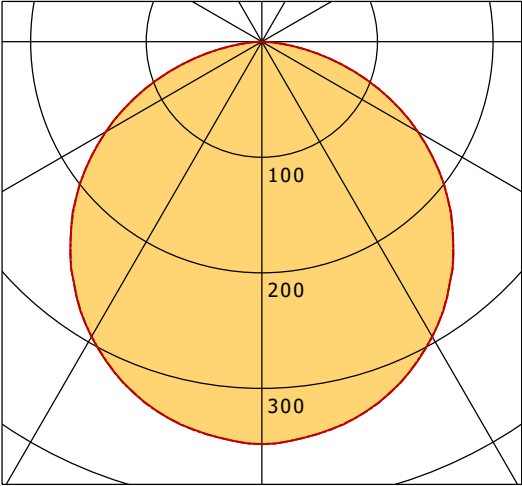

	C0	C90	C180	C270
0°	348	348	348	348
15°	334	334	334	334
30°	295	295	295	295
45°	233	234	233	234
60°	156	156	156	156
75°	66	66	66	66
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

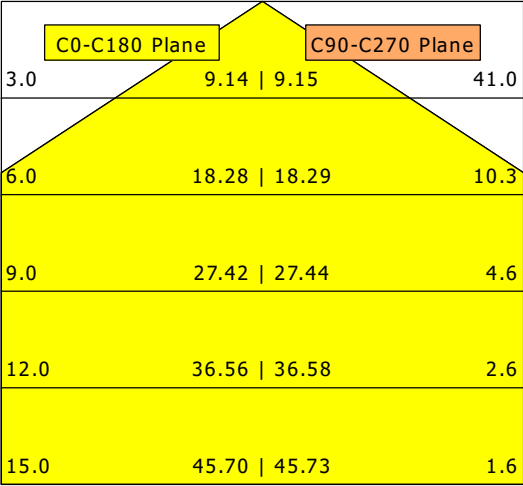

η	LED
Efficiency	82 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	13 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.8
UGR C90/C270	21.8
CIE Flux Codes	47 79 96 100 100
Ra/CRI	> 80