


SCELP 501.3027.35/DALI

Scene 5 (1xLED 36W 827/2700K 3030lm 35 °)

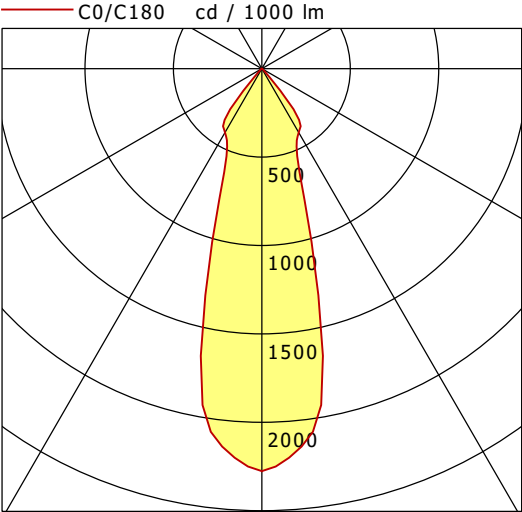

	C0	C90	C180	C270
0°	2276	2276	2276	2276
15°	1163	1163	1163	1163
30°	417	417	417	417
45°	22	22	22	22
60°	4	4	4	4
75°	1	1	1	1
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	1.63	766.3
6.0	3.26	191.6
9.0	4.89	85.1
12.0	6.52	47.9
15.0	8.14	30.7

η		LED
Efficiency		84 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		36 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		18.7
UGR C90/C270		18.7
CIE Flux Codes	97 100 100 100 100	
Ra/CRI		> 80