


## Basic-A6

Surface mounted luminaire - Direct only omnidirectional light distribution

Article code: BA6FSE-840M-D400

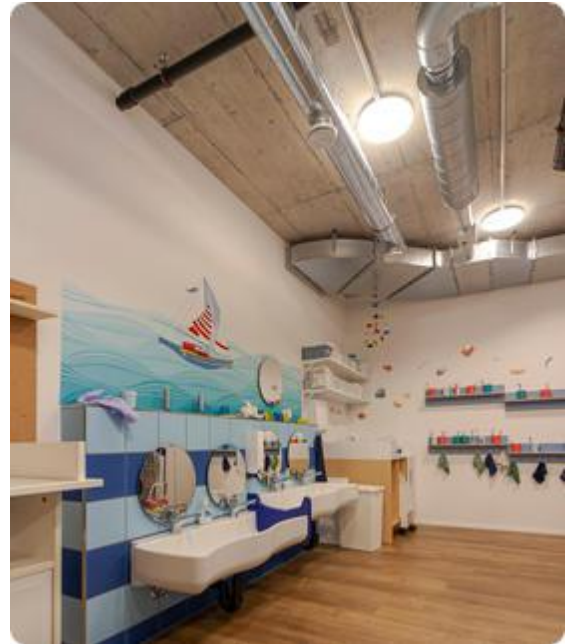

Illustrations may only be similar and serve as an orientation.


Basic-A6. LED. Surface mounted luminaire for wall or ceiling mounting. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct only omnidirectional light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Ambient diffuser made of frosted methacrylate for enhanced light transmission and perfect uniform illumination. Switchable. DxH (round). D=400mm. H=35+25mm.

Medium-power current. 1850lm. 13W. 3,5kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

## Basic-A6

Surface mounted luminaire - Direct only omnidirectional light distribution

Article code: BA6FSE-840M-D400



Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

|                              |  |
|------------------------------|--|
| Productname                  | Basic-A6                                       |
| Lamp                         | LED  |
| Installation Type            | Surface mounted luminaire                      |
| Surface finish               | Radiant Silver                                 |
| Light characteristics        | Direct only omnidirectional light distribution |
| Colour temperature           | 4000K  |
| Colour Rendering Index (CRI) | CRI>80   |
| Optical system               | Ambient diffuser                               |
| Control                      | Switchable                                     |
| Length L/Diameter D (mm)     | D=400mm  |
| Height H (mm)                | H=35+25mm                                      |
| Current/Power                | Medium-Power                                   |
| Luminous Flux                | 1850lm   |
| Power consumption            | 13W  |
| Degree of protection         | IP20   |
| Certification                | Prüfzeichen: ENEC                              |
| LED lifetime                 | L85B10 (tq 25°C) = 50.000h                     |
| Photometric code             | 8 40 / 3 3 9                                   |
| Photobiological class        | RG0 (EN62471)                                  |
| Indoor/Outdoor               | Indoor: ta [ambient] max. 25°C                 |
| Weight (kg)                  | 3,5kg  |

