


ML-A 060.10840.3 AOV/DALI


Monoline 060 | Surface-Mounted (1xLED 21W 840/4000K 3260lm)

— C0/C180 cd / 1000 lm - - - C90/C270

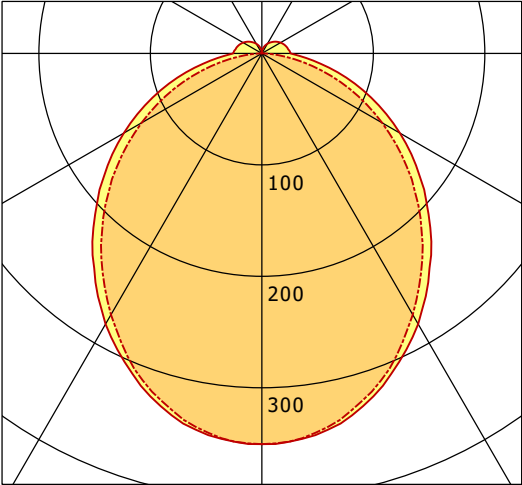

	C0	C90	C180	C270
0°	351	351	351	351
15°	332	328	332	328
30°	280	271	280	271
45°	213	200	213	200
60°	143	125	143	125
75°	74	51	74	51
90°	26	1	26	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

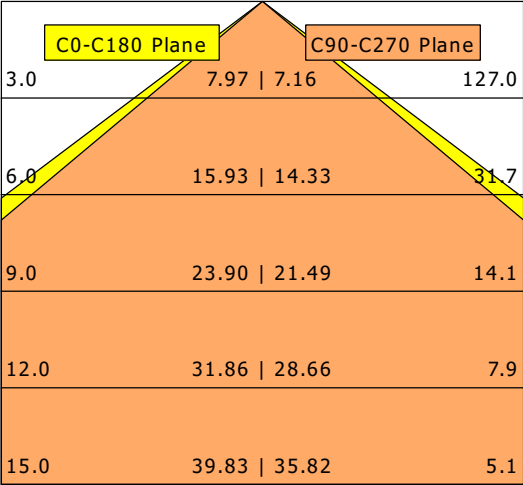

η		LED
Efficiency		155 lm/W
Direct/Indirect		↓ 93% / ↑ 7%
System Power		21 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		23.8
UGR C90/C270		23.1
CIE Flux Codes		48 78 94 93 100
Ra/CRI		> 80