


LK-L 070.11830.1685.1/DALI/NO


Lichtkanal 070 | Light-Insert (APB, 1xLED 38W 830/3000K 6150lm)

— C0/C180 cd / 1000 lm - - - C90/C270

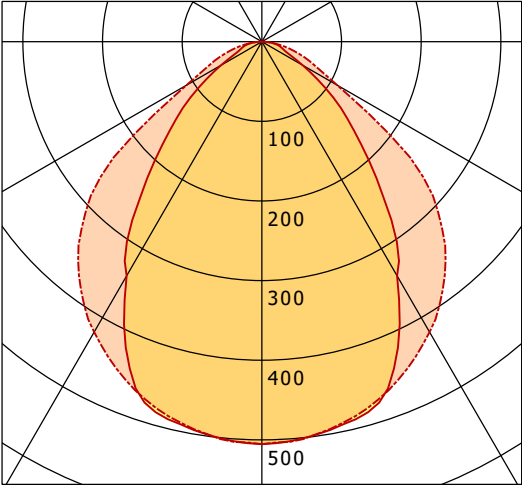

	C0	C90	C180	C270
0°	505	505	505	505
15°	487	482	487	482
30°	340	421	340	421
45°	170	316	170	316
60°	59	109	59	109
75°	24	38	24	38
90°	1	0	1	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

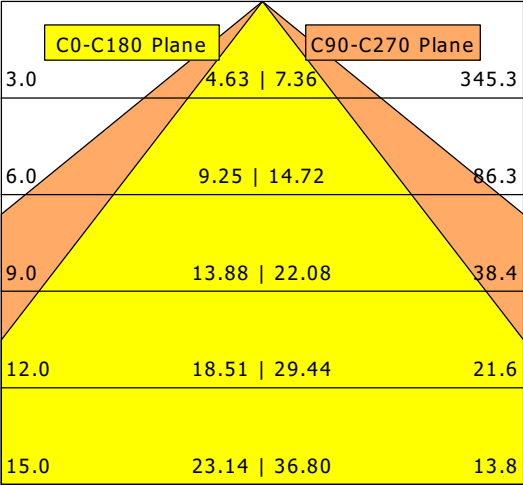

η		LED
Efficiency		162 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		38 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		21.6
UGR C90/C270		24.0
CIE Flux Codes		63 89 98 100 100
Ra/CRI		> 80