


FYR 104.0625.840/DALI


Fyrre (1xLED 37W 840/4000K 4480lm)

— C0/C180 cd / 1000 lm - - - C90/C270

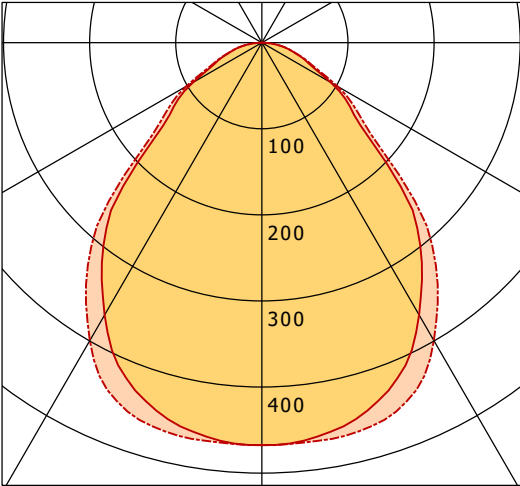

	C0	C90	C180	C270
0°	467	467	467	467
15°	448	464	448	464
30°	365	400	365	400
45°	217	240	217	240
60°	92	101	92	101
75°	35	35	35	35
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

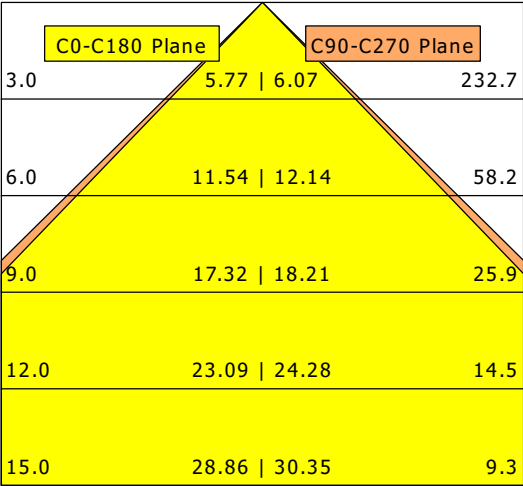

η	LED
Efficiency	121 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	37 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.3
UGR C90/C270	18.6
CIE Flux Codes	61 87 97 100 100
Ra/CRI	> 80