
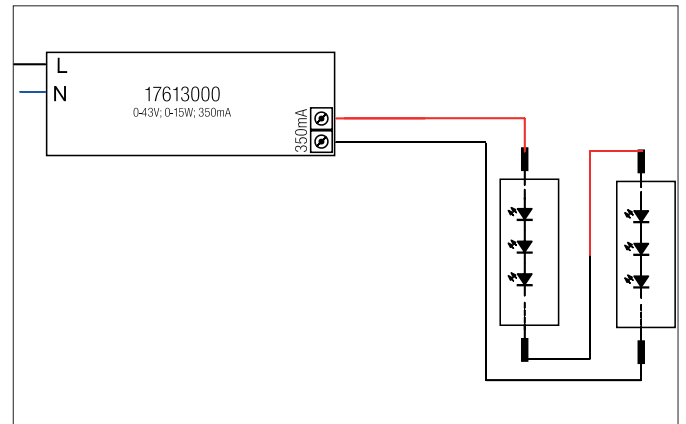


## LED converter 350 mA, on/off switchable

Article no. 17613000

Light.  
For Generations.

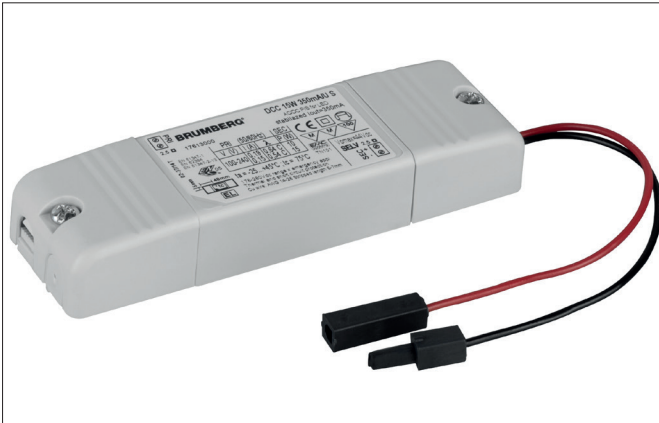

### Tender

LED converter 350 mA, on/off switchable. This driver fulfills the requirements for safety lighting systems in accordance with DIN EN 50172 VDE 0108-100:2005-01. This converter is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 2.5 mm<sup>2</sup>. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 350 mA, Voltage: 230V AC 50Hz, Power: 15W, Control: on/off.

Article data	
Article no.	17613000
GTIN	4250047778721
Short description	LED converter 350 mA, on/off switchable
Material	Plastic
Length	115 mm
Width	34 mm
Height	19 mm
Scope of delivery	Plug&Play version with 110 mm P&P output cable
Weight	0.067 kg

**LED converter 350 mA, on/off switchable**

Article no. 17613000

Light.  
For Generations.

Operating technology of driver	
AC nominal voltage min	100 V
AC nominal voltage max	240 V
Frequenz max.	50 Hz
DC nominal voltage min	176 V
DC nominal voltage max	280 V
Current	350 mA
Protection class	II
Degree of protection	IP20
Starting current	27 A (250 µs)
Power min	1 W
Power	15 W
Control	on/off
Environment temperature (ta)	0°C up to 40°C
Measure point (tc)	max. +75 °C
Version	Plug&Play

Packing data	
Gross weight	0.088 kg
Length of packaging	60 mm
Packaging width	27 mm
Packaging height	150 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>